



SMALL UNIVERSAL ACCESSORY POUCH 1478

FITS: UNIVERSAL FOR 3/4" TO 1-3/4" BARS AND DIRECTLY TO UNIVERSAL HANDLEBAR ACCESSORY MOUNT. UNIVERSAL FITMENT WITH HOOK AND LOOP STRAP

PARTS INCLUDED

- 1 Small Universal Pouch (3-1/2" Tall x 2-1/4" Wide)
1 Hardware Kit Including:
1 Mounting Plate
1 T Clip
1 Rubber Bar Mount
3 6-32 Button Head Cap Screw
1 6-32 Square Machine Nut
1 Foam Pad
1 8" x 1" Hook and Loop Strap
1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

TOOLS SUGGESTED

Set of Hex Wrenches

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

PROCEDURE

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface; turn off the ignition and allow the engine to cool.

STEP 2 Find an appropriate mounting location and be sure you will not have any interference from the fuel tank or any other accessories.

STEP 3 Determine which mounting hardware better suits your application. The pouch comes with two different mounting options. A Rubber Bar Mount strap and a Hook and Loop strap.

CAUTION! It is the installers responsibility to ensure the accessory pouch is secured appropriately and stays secure.

CAUTION! Kuryakyn is not responsible for damage of any kind to products placed in the accessory pouch.

CUSTOMER SERVICE
877.370.3604 (toll free)

INSTALLATION QUESTIONS
techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
• The product must be properly installed, maintained and operated under normal conditions.
• Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
• Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
• Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
• Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
• Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today-select the "CATALOGS" icon. Each Kuryakyn® product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.



POUCH WITH RUBBER BAR MOUNT ASSEMBLY

STEP 1 The accessory pouch comes assembled with the Rubber Bar Mount. This mount can be adjusted to a high or low position depending on your mounting location.

STEP 2 To adjust the position, Remove the 3 screws (inside the pouch) securing the Rubber Bar Mount. Be sure to keep the square nut and T-Clip for re-installation.

STEP 3 The pouch and backing plate have 2 sets of holes drilled in them. (PIC 2) Choose either the high or low mounting position and line up the holes with backing plate.

STEP 4 Using the three (3) screws removed in Step 2, insert one into each hole of the backing plate and into the holes in the pouch.

STEP 5 Place the Rubber Bar Mount assembly (with square nut and T-Clip installed) over the 3 screws. Start by tightening the center screw and square nut; then the top two screws in to the threaded T-Clip.

NOTE Make sure that the T-Clip is installed as shown in PIC 3.

STEP 6 Once you have all the screws tight, you can take the provided foam pad and peel the adhesive backing off. Place it over the screw heads to protect anything that is in the pouch.

STEP 7 Install the pouch and check for clearance.

CAUTION! Ensure that the installation of this product does not interfere with the proper operation of the motorcycle before riding.

ATTENTION! It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not issue a warranty on components lost due to improper installation. Periodic maintenance may be required.

POUCH WITH HOOK AND LOOP ASSEMBLY

STEP 1 Take the pouch out of the package and remove the Rubber Bar Mount. Notice the mounting holes as well as the slots (the slots used for the hook and loop strap).

STEP 2 Take the plastic backing plate and place each end of the hook and loop strap through each slot. (PIC 4)

STEP 3 Place the plastic insert with the strap mounted through it inside of the pouch. Slide each end of the strap through the slots on the backside of the pouch. (PIC 5)


STEP 4 Place it over the desired mounting area and connect the ends to tighten. (PIC 6)

CAUTION! Ensure that the installation of this product does not interfere with the proper operation of the motorcycle before riding.


Ride On!

Kuryakyn[®]

PIC. 1

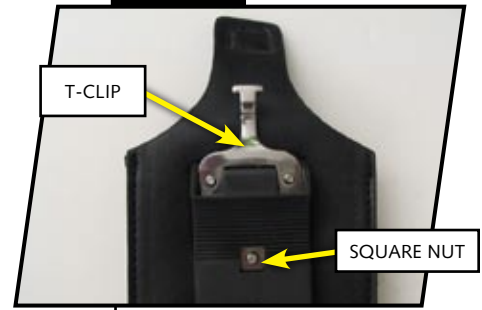

PIC. 2

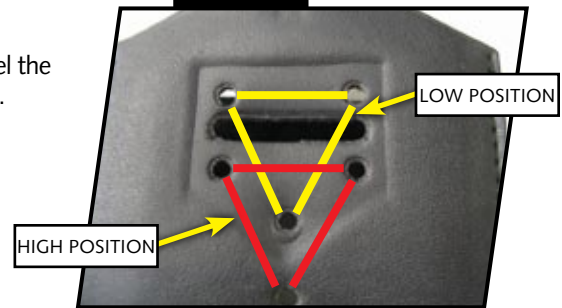

PIC. 3



PIC. 4



PIC. 6



PIC. 5



PAGE

2