



INSTALLATION

STANDARD ACCESSORY MOUNT/WINDSHIELD MOUNT 1674

PARTS INCLUDED

- 1 Standard Accessory Mount—Black
- 1 Windshield Mount—Chrome
- 1 Hardware Kit Containing:
 - 1 1/4" Internal Tooth Lock Washer
 - 1 1/4" Lock Washer
 - 1 #12-24 X 1" Torx Head Cap Screw
 - 1 #12-24 X 3/4" Torx Head Cap Screw
 - 4 #8-32 X 3/4" Phillips Head Pan Screws
 - 4 #8 Nylock Nuts
 - 8 #8 Flat Washers
 - 4 6" Black Nylon Cable Ties
 - 1 Package Anti Seize
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND NOTICES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING	THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.
NOTICE	This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality or damage the product itself or the product it is being attached to.
CAUTION	This indication alerts you to the fact that ignoring the contents described herein can result in minor or moderate potential injury.

TOOLS SUGGESTED

Set of Torx Wrenches, Set of Combination Wrenches, Phillips Screwdriver

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

NOTICE

IF INSTALLING THIS PRODUCT FOR ANOTHER PARTY, PLEASE MAKE SURE THEY RECEIVE THIS COPY OF THE INSTALLATION INSTRUCTIONS SO THEY ARE AWARE OF THE IMPORTANT INFORMATION CONTAINED IN THEM.

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.

CAUTION Ensure that the installation of this product does not interfere with the proper operation of the motorcycle before riding.

CUSTOMER SERVICE
877.370.3604 (toll free)

INSTALLATION QUESTIONS
techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
 - The product must be properly installed, maintained and operated under normal conditions.
 - Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
 - Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Kuryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

For purchasing Kuryakyn® products, you can receive a complete catalog free of charge. Send the Proof-of-Purchase below with your address to: Kuryakyn, P.O. Box 339, Somerset, WI 54025. Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.



kuryakyn.com

NOTICE

Avoid damage to the motorcycle. Protect painted surfaces with a soft cloth or blanket.

NOTICE

It is the installer's responsibility to ensure that there is adequate clearance between the Standard Accessory Mount and any painted surfaces. Küryakyn is not responsible for any damage due to inadequate clearance.

NOTICE


Be aware of any cables/wires that could potentially be pinched or crushed while using this product.

STEP 2

Place a clean, soft blanket over the gas tank to protect the paint.

STEP 3

The Windshield Mount may be mounted on any of the fasteners that hold the brackets to the windshield. After you have chosen your location, remove the fastener. Retain the acorn nut, it will be reused.

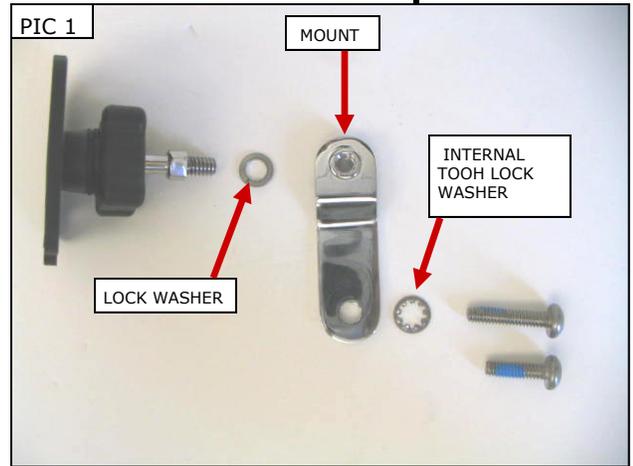


NOTICE

Use the supplied anti-seize for fasteners; this will prevent galling and make future removal of fasteners easier.

For HD windshields: Choose the Torx head cap screw from the hardware kit that is the next length longer than the OEM fastener. Insert the Torx head cap screw through the front of the windshield bracket, through the internal tooth lock washer, the non-threaded hole in the Accessory Mounting bracket, and fasten it with the OEM acorn nut as shown in PIC 1 and PIC 2.

For Metric and Universal windshields: If the OEM fastener is not long enough to fit with the additional thickness of the Accessory Mounting Bracket (at least three full turns going into the nut), you may have to source a longer fastener at your local hardware store. Insert the fastener through the front of the windshield bracket, through the internal tooth lock washer, the non-threaded hole in the Accessory Mounting bracket, and fasten it with the OEM nut as shown in PIC 1 and PIC 2.

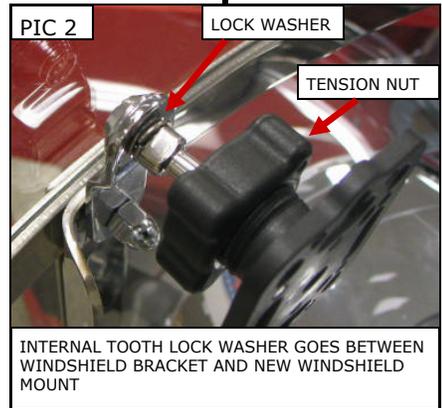

STEP 5

Install the Accessory Mount Plate to the Windshield Mount by inserting the metal shaft through the included 1/4" lock washer and thread it into the threaded hole in the Windshield Mount. Use the flats on the Accessory Mount Plate to tighten securely

STEP 6

Turn the handlebars in both directions to their full stop position and ensure that there is clearance between the mounting plate/accessory and the gas tank, dash and other accessories.

WARNING

ENSURE THAT THERE IS CLEARANCE AT ALL POINTS WHEN THE HANDLEBARS ARE TURNED, INSUFFICIENT CLEARANCE MAY CAUSE DAMAGE TO THE MOTORCYCLE OR CAN CAUSE LOSS OF CONTROL THAT COULD RESULT IN SEVERE INJURY OR DEATH.

WARNING

TO PREVENT POSSIBLE LOSS OF CONTROL, WHICH COULD RESULT IN A POSSIBLE INJURY OR DEATH, WE DO NOT RECOMMEND REMOVING, REPLACING OR ADJUSTING THE DEVICE ON THE ACCESSORY MOUNT PLATE WHILE RIDING THE MOTORCYCLE.

NOTICE

It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Küryakyn will not provide warranty coverage on products or components lost due to improper installation or lack of maintenance. Periodic inspection and maintenance are required on all fasteners.


USING THE ACCESSORY MOUNT PLATE

STEP 1 The Accessory Mount Plate has a variety of slots and holes to allow you to mount many different mobile device holders. PIC 3 Use the included #8 screws, washers and lock nuts to secure the device holder (sold separately) to the Accessory Mount Plate.

A—Standard AMPS pattern

B—Küryakyn Tech-Connect pattern and Ram Mount pattern

C—Küryakyn Accessory Pouches pattern

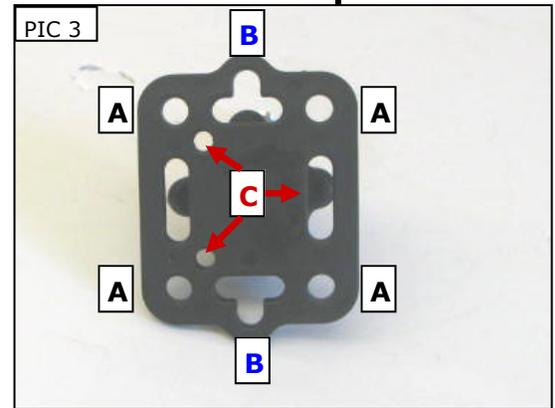


STEP 2 To remove the Accessory Mount Plate from the bike for storage, loosen the tensioning nut on the back side of the holder until it clears the threads. PIC 4 Snap the Accessory Mount Plate off of the ball. PIC 5 Remove the tension nut and thread it to the Accessory Mount Plate for storage.



STEP 3 To replace the Accessory Mount Plate on the swivel ball, remove the tension nut from the back. Slide the tension nut over the swivel ball, snap the Accessory Mount Plate back on the swivel ball and thread the tension nut onto the Accessory Mount Plate. Tighten the tension nut to the desired tension.

STEP 4 To adjust the angle of the Accessory Mount Plate, loosen the tensioning nut, adjust the Accessory Mount Plate to the desired position and tighten the tension nut. PIC 2 The tension nut will allow you to keep the Accessory Mount Plate in the same position or, with a little less tension, allow you to move the Accessory Mount Plate on the swivel ball.

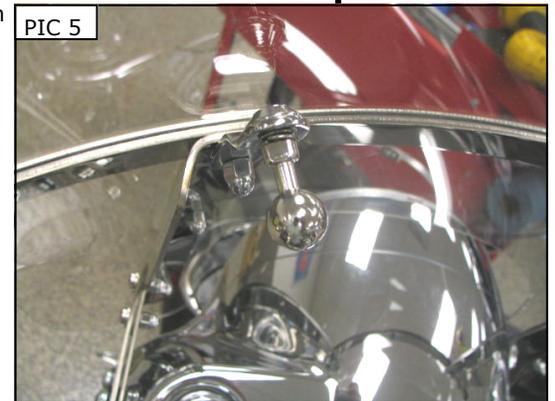

WARNING DO NOT ATTEMPT TO OPERATE OR REMOVE THE MOBILE DEVICE FROM THE MOUNT PLATE WHILE OPERATING THE MOTORCYCLE.

WARNING ENSURE THAT THERE IS CLEARANCE AT ALL POINTS WHEN THE HANDLEBARS ARE TURNED, INSUFFICIENT CLEARANCE MAY CAUSE DAMAGE TO THE MOTORCYCLE OR CAN CAUSE LOSS OF CONTROL THAT COULD RESULT IN SERIOUS INJURY OR DEATH.

NOTICE Ensure that the Mobile Device is secure on the Standard Accessory Mount. Küryakyn is not responsible for any Device that is stolen or damaged from use on this Mount or from the Mount not being properly secured to the motorcycle. It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Küryakyn will not issue a warranty on components lost due to improper installation. Periodic inspection and maintenance are required on all fasteners.

NOTICE Motorcycling can be done in a harsh environment. Make sure your Mobile Device is appropriate for this application.