



## PREMIUM ACCESSORY PIVOT MOUNT for 1-1/4" BARS 1678

### PARTS INCLUDED

- 1 Accessory Mounting Plate—Black
- 1 1-1/4" Handlebar Clamp—Chrome
- 1 Pivot Plate Mount Kit
  - 4 #8-32 X 1" Phillips Head Pan Screws
  - 4 #8-32 Nylock Nuts
  - 4 #8 Flat Washers
  - 4 6" Black Nylon Cable Ties
  - 1 Anti-Seize Packet
- 1 Hardware Kit
  - 2 Shim Washers
  - 1 5/16" Split Lock Washer
  - 1 Thumb Nut
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

### THANK YOU FOR CHOOSING KÜRYAKYN!

**IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.**

**WARNING!** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

**ATTENTION!** This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

**CAUTION!** This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

### TOOLS SUGGESTED

Set of Combination Wrenches, Adjustable Wrench, Set of Hex Wrenches

**STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.**

**STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.

**CAUTION!** Avoid damage to the motorcycle. Protect painted surfaces with a soft cloth or blanket.

**ATTENTION!** Determine the mounting location and orientation of the Accessory Mount before fully tightening the two Clamp screws. The Clamp may leave marks on the handlebar when tightened down.

### CUSTOMER SERVICE

877.370.3604 (toll free)

### INSTALLATION QUESTIONS

techsupport@kuryakyn.com  
or call 715.247.2983

### LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
  - The product must be properly installed, maintained and operated under normal conditions.
  - Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
  - Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Kuryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.
  - Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

### ABOUT OUR CATALOG

For purchasing Kuryakyn® products, you can receive a complete catalog free of charge. Send the Proof-of-Purchase below with your address to: Kuryakyn, P.O. Box 339, Somerset, WI 54025. Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.



**CAUTION!** Ensure that the installation of this product does not interfere with the proper operation of the motorcycle before riding.

**CAUTION!** It is the installer's responsibility to ensure that there is adequate clearance between the Standard Accessory Mount and any painted surfaces. Küryakyn is not responsible for any damage due to inadequate clearance.

**CAUTION!** Be aware of any cables/wires that could potentially be pinched or crushed while using this product.

**ATTENTION!** Ensure that the supplied anti-seize is applied to all threaded fasteners before installation; this will make future removal of the fasteners easier.

**STEP 2** Separate the clamp and place the clamp halves around a straight portion of the handlebar. Apply anti-seize to the two clamp screws and finger tighten the clamp to the bar.

**NOTE:** The Clamp can be installed on the top or bottom side of the handlebar for best riding position.



**STEP 3** As Shown in PIC 2, insert the threaded stud of the Accessory Mount into the clamp. Mount the 5/16" Lock Washer and one or two shim washers from the hardware kit to the stud. Thread the included Thumb Nut onto the stud. Tighten securely.

**NOTE:** You may need to use an adjustable wrench to hold the hex portion of the shaft, and a flat blade screwdriver in the slot on the Thumb Nut, when tightening. PIC 2 Periodically check the tightness of the Thumb Nut.

**STEP 6** Turn the handlebars in both directions to their full stop position and ensure that there is clearance between the mounting plate/accessory and the gas tank, dash and other accessories.

**WARNING!** ENSURE THAT THERE IS CLEARANCE AT ALL POINTS WHEN THE HANDLEBARS ARE TURNED. INSUFFICIENT CLEARANCE MAY CAUSE DAMAGE TO THE MOTORCYCLE OR CAN CAUSE LOSS OF CONTROL THAT COULD RESULT IN SEVERE INJURY OR DEATH.

**ATTENTION!** It is the installer's responsibility to ensure that all of the fasteners (including preassembled) are tightened before operation of the motorcycle. Küryakyn will not issue a warranty on components lost due to improper installation. Periodic maintenance may be required.

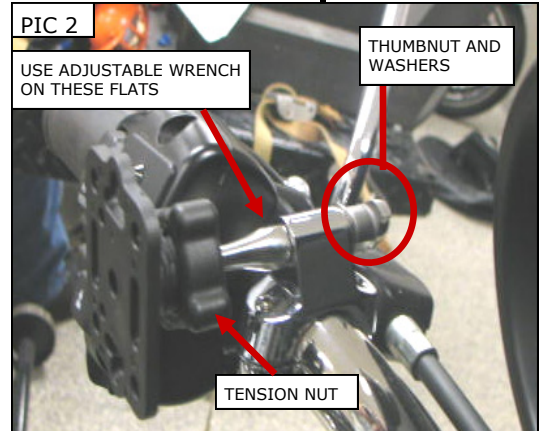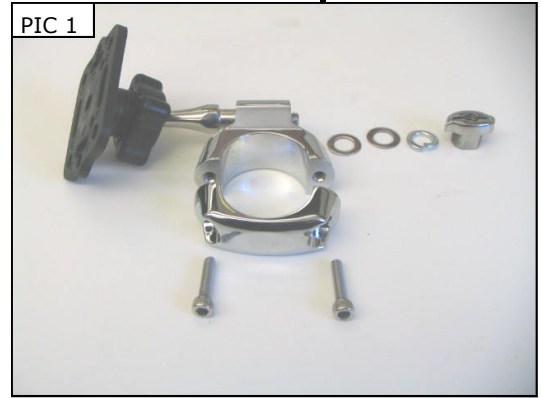


-cont.-

**USING THE STANDARD ACCESSORY MOUNT**

**STEP 1** The Standard Accessory mount has a variety of slots and holes to allow you to mount many different mobile device holders. PIC 3 Use the included #8 screws, washers and lock nuts to secure the device holder (sold separately) to the Accessory Mount.

- A**—Standard AMPS pattern
- B**—Kuryakyn Tech-Connect pattern and Ram Mount pattern
- C**—Kuryakyn Accessory Pouches pattern

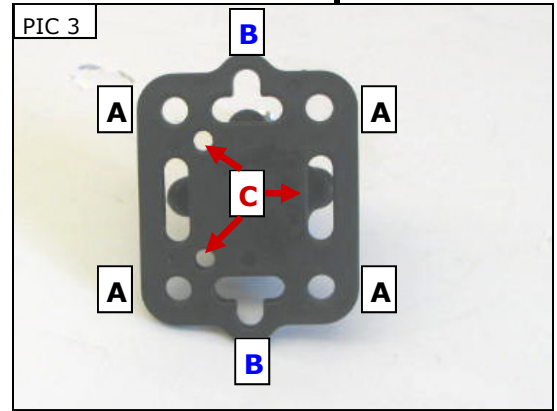

**STEP 2** To remove the Accessory Mount Plate from the bike for storage, simply remove the Thumb Nut and washers from the Accessory Mount Plate and remove the plate from the mount. PIC 4

**STEP 3** To replace the Accessory Mount, insert the threaded stud of the Accessory Mount into the clamp. Mount the 5/16" Lock Washer and one or two shim washers from the hardware kit to the stud. Thread the included Thumb Nut onto the stud. Tighten securely. PIC 2



**STEP 4** To adjust the angle of the Accessory Mount, loosen the tensioning nut, adjust the Accessory Mount to the desired position and tighten the tension nut. PIC 2 The tension nut will allow you to keep the Accessory Mount in the same position or, with a little less tightness, allow you to move the Accessory Mount on the swivel ball.

**CAUTION!** Kuryakyn is not responsible for items that may be stolen or damaged in relation to the use of this product.

**CAUTION!** Ensure that the Mobile Device is secure on the Accessory Mount. Kuryakyn is not responsible for any Device that is damaged from use on this Mount or from the Mount not being properly secured to the motorcycle.

**CAUTION!** Motorcycling can be done in a harsh environment. Make sure your Mobile Device is appropriate for this application.

**WARNING!** DO NOT ATTEMPT TO OPERATE OR REMOVE THE MOBILE DEVICE FROM THE MOUNT WHILE OPERATING THE MOTORCYCLE.

**ATTENTION!** It is the installer’s responsibility to ensure that all of the fasteners (including preassembled) are tightened before operation of the motorcycle. Kuryakyn will not issue a warranty on components lost due to improper installation. Periodic maintenance may be required.

**WARNING!** ENSURE THAT THERE IS CLEARANCE AT ALL POINTS WHEN THE HANDLEBARS ARE TURNED. INSUFFICIENT CLEARANCE MAY CAUSE DAMAGE TO THE MOTORCYCLE OR CAN CAUSE LOSS OF CONTROL THAT COULD RESULT IN SEVERE INJURY OR DEATH.