



## STANDARD ACCESSORY MOUNT W/MIRROR MOUNT

## 1799

### PARTS INCLUDED

- 1 Standard Accessory Mount with Pivot Mount—Black
- 1 Mirror Mount Kit Containing:
  - 1 Mirror Mount—Chrome
  - 1 M10 Internal Tooth Lock Washer
  - 1 5/16" Flat Washer
  - 1 Package Anti-Seize
- 1 Hardware Kit Containing:
  - 2 Shim Washers
  - 1 5/16" Lock Washer
  - 1 Thumb Nut
- 1 Hardware Kit Containing:
  - 4 #8-32 X 3/4" Phillips Head Pan Screws
  - 4 #8 Nylock Nuts
  - 8 #8 Flat Washers
  - 4 6" Black Nylon Cable Ties
  - 1 Package Anti Seize
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

### THANK YOU FOR CHOOSING KÜRYAKYN!

**IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND NOTICES REGARDING THE USE AND CARE OF THIS PRODUCT.**



**THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.**



**This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.**



**This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.**



**IF INSTALLING THIS PRODUCT FOR ANOTHER PARTY, PLEASE MAKE SURE THEY RECEIVE THIS COPY OF THE INSTALLATION INSTRUCTIONS SO THEY ARE AWARE OF THE IMPORTANT INFORMATION CONTAINED IN THEM.**

### TOOLS SUGGESTED

Set of Metric and Standard Combination Wrenches,

**STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.**

### STEP 1

Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.

### CUSTOMER SERVICE

877.370.3604 (toll free)

### INSTALLATION QUESTIONS

techsupport@kuryakyn.com  
or call 715.247.2983

### LIMITED WARRANTY

Küryakyn warrants that any Küryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Küryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
  - The product must be properly installed, maintained and operated under normal conditions.
  - Küryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
  - Küryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Küryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Küryakyn and a customer.
- Küryakyn products are often intended for use in specific applications. Küryakyn makes no warranty if a Küryakyn product is used in applications other than intended.

- Küryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Küryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.
- Küryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Küryakyn. Küryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

### ABOUT OUR CATALOG

For purchasing Küryakyn® products, you can receive a complete catalog free of charge. Send the Proof-of-Purchase below with your address to: Küryakyn, P.O. Box 339, Somerset, WI 54025. Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Küryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Küryakyn USA® All Rights reserved.



**CAUTION** Ensure that the installation of this product does not interfere with the proper operation of the motorcycle before riding.

**NOTICE** It is the installer's responsibility to ensure that there is adequate clearance between the Standard Accessory Mount Plate and any painted surfaces. Küryakyn is not responsible for any damage due to inadequate clearance.

**NOTICE** Avoid damage to the motorcycle. Protect painted surfaces with a soft cloth or blanket.

**STEP 2** Determine which side of the motorcycle that you would like to mount the Mirror Mount. Remove that mirror.

**STEP 3** Determine the orientation of the mirror mount so that it will not interfere with any component on the motorcycle. (The typical mounting position is opposite the direction of the mirror head.) PIC 1 Insert the threaded portion of the mirror through the mirror mount. Place the included internal tooth lock washer under the mirror mount and thread the mirror back to the mount on the motorcycle. **(Depending on the area of installation you may need to use the included flat washer between the internal tooth lock washer and the Mirror Mount to give the Mount a level surface.)**

**NOTICE** Confirm proper thread depth engagement between the mirror and the perch. The mirror should thread in to the perch 1-1/2 times it's thread diameter.

**NOTICE** Ensure that the supplied anti-seize is applied to all threaded fasteners before installation; this will make future removal of the fasteners easier.



**STEP 4** To mount the Standard Accessory Mount Plate, place the stud through the mirror mount, lining up the edges of the flats on the stud with the notches in the mirror mount. PIC 2 Place the shim washer(s) first, then the lock washer over the protruding end. Apply anti-seize to the threaded portion of the stud and secure with the thumb nut. PIC 3

**STEP 5** Turn the handlebars in both directions to their full stop position and ensure that there is clearance between the Standard Accessory Mount Plate and the gas tank, dash and other components on the motorcycle.

**WARNING** ENSURE THAT THERE IS CLEARANCE AT ALL POINTS WHEN THE HANDLEBARS ARE TURNED. INSUFFICIENT CLEARANCE MAY CAUSE DAMAGE TO THE MOTORCYCLE OR CAN CAUSE LOSS OF CONTROL THAT COULD RESULT IN SERIOUS INJURY OR DEATH.

**WARNING** TO PREVENT POSSIBLE LOSS OF CONTROL, WHICH COULD RESULT IN SERIOUS INJURY OR DEATH, WE DO NOT RECOMMEND REMOVING, REPLACING OR ADJUSTING THE DEVICE ON THE STANDARD ACCESSORY MOUNT PLATE WHILE RIDING THE MOTORCYCLE.


**NOTICE** It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Küryakyn will not provide warranty coverage on products or components lost due to improper installation or lack of maintenance. Periodic inspection and maintenance are required on all fasteners.

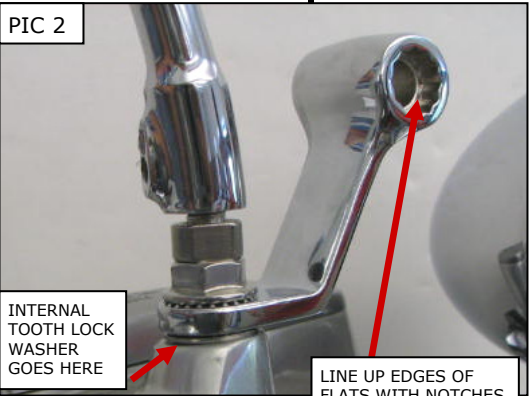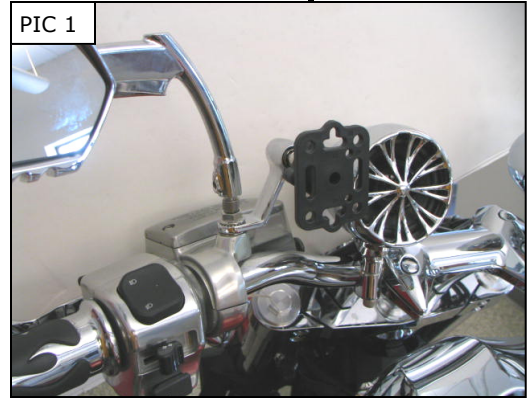

## USING THE STANDARD ACCESSORY MOUNT

**STEP 1** The Standard Accessory Mount has a variety of slots and holes to allow you to mount many different mobile device holders. PIC 4 Use the included #8 screws, washers and lock nuts to secure the device holder (sold separately) to the Standard Accessory Mount.

- A**—Standard AMPS pattern
- B**—Küryakyn Tech-Connect pattern and Ram Mount pattern
- C**—Küryakyn Accessory Pouches pattern

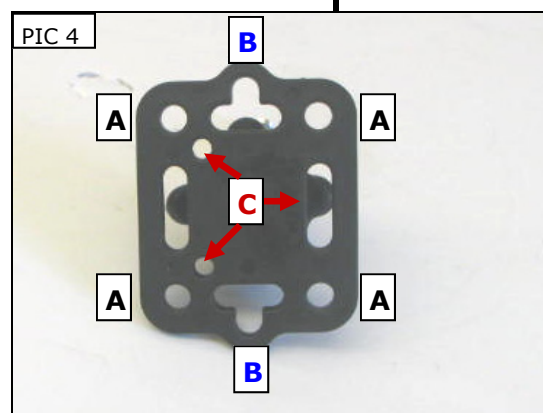

**STEP 2** To remove the Standard Accessory Mount Plate from the bike for storage, simply remove the Thumb Nut and washers from the Standard Accessory Mount Plate and remove the plate from the mount. PIC 3

**STEP 3** To replace the Standard Accessory Mount, insert the threaded stud of the Standard Accessory Mount into the Mirror Mount. Place the one or two shim washers, then the 5/16" Lock Washer onto the stud. Thread the included Thumb Nut onto the stud. Tighten securely. PIC 2

**STEP 4** To adjust the angle of the Standard Accessory Mount, loosen the tensioning nut, adjust the Standard Accessory Mount to the desired position and tighten the tension nut. The tension nut will allow you to keep the Standard Accessory Mount in the same position or, with a little less tightness, allow you to move the Standard Accessory Mount on the swivel ball.

**WARNING** ENSURE THAT THERE IS CLEARANCE AT ALL POINTS WHEN THE HANDLEBARS ARE TURNED. INSUFFICIENT CLEARANCE MAY CAUSE DAMAGE TO THE MOTORCYCLE OR CAN CAUSE LOSS OF CONTROL THAT COULD RESULT IN SERIOUS INJURY OR DEATH.

**WARNING** DO NOT ATTEMPT TO OPERATE OR REMOVE THE MOBILE DEVICE WHILE OPERATING THE MOTORCYCLE.

**NOTICE** Ensure that the Mobile Device is secure to the Standard Accessory Mount Plate. Küryakyn is not responsible for any Device that is stolen or damaged from use on this mount Plate or from the Mount Plate not being properly secured to the motorcycle. It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Küryakyn will not provide warranty coverage on products or components lost due to improper installation or lack of maintenance. Periodic inspection and maintenance are required on all fasteners.

**NOTICE** Motorcycling can be done in a harsh environment. Make sure your Mobile Device is appropriate for this application.