



### SKELETON HAND TURN SIGNAL WITH CHROME STEM AND BLACK HEADS

2528

#### Thank You For Choosing Kuryakyn!

Protect yourself and others from potential injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

#### **WARNING**

THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

#### **NOTICE**

This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality or damage the product itself or the product to which it is being attached.

#### ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- 1 Left Skeleton Hand Turn Signal
- 1 Right Skeleton Hand Turn Signal
- 1 Hardware Kit containing:
  - 8 Female T-Tap Connectors
  - 8 Male Spade Connectors
  - 1 Dielectric Grease Pack
- 1 Installation Instructions

#### YOU WILL ALSO NEED:

Set of Metric combination wrenches, test light, wire crimping tool, and silicone

- STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn **IGN OFF**. Allow the engine and exhaust system to cool.

#### **NOTICE**

These installation instructions contain important information. Ensure that the end user receives this copy and is aware of its importance for future use.

Skeleton Hand Turn Signals are ECE compliant.

#### **WARNING**

THE END USER'S SAFETY DEPENDS UPON PROPER INSTALLATION OF THIS PRODUCT. IF A STEP IN THESE INSTRUCTIONS IS NOT WITHIN YOUR CAPABILITIES OR YOU DO NOT HAVE THE CORRECT TOOLS, HAVE YOUR DEALER PERFORM THE PROCEDURE. IMPROPER INSTALLATION OF THIS PRODUCT COULD RESULT IN DEATH OR SERIOUS INJURY.

- STEP 2** Remove the nuts and lock washers from both of the Skeleton Hand Turn Signal mounting studs. Set the nuts and washers aside for now; they will be reused.


- STEP 3** Determine the mounting locations for both of the Lights. Refer to **PICT 1**. The threaded stud is M8 X 1.25 X 20MM (approx. 3/4").

#### **NOTICE**

Avoid damage to the motorcycle. Protect painted surfaces with a soft cloth or blanket.

- STEP 4** Install one Skeleton Hand Turn Signal at a time. Insert the wiring and stud through the mounting hole; secure the Light to the mount with the nut and washer removed in **STEP 2**. **DO NOT** over-tighten the nut.

**NOTE:** Refer to **PIC 1**. Seal the open ends of the Skeleton Hand Turn Signal studs with silicone to prevent moisture from damaging the L.E.D.s.

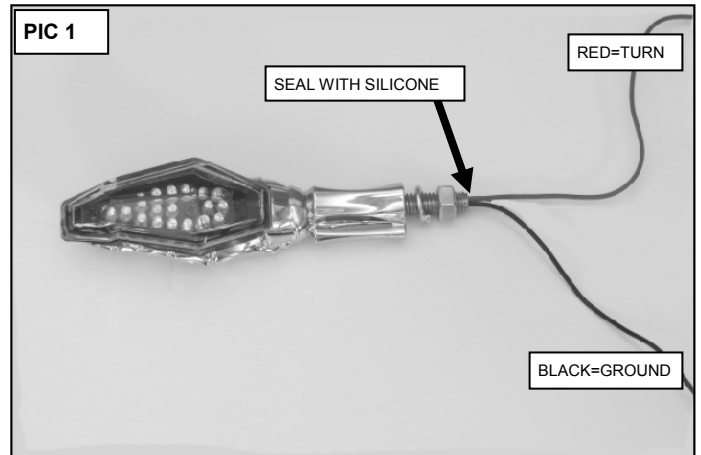

**STEP 5** Repeat **STEP 4** for the other side.

**STEP 6** Turn the key "ON".


Use a test light or the wiring diagram for your bike to locate the left and right turn-signal power wires, and ground wire. Record the color of the wires here.

**FIG 1**

	LEFT TURN	GROUND	RIGHT TURN

**STEP 7** Turn the key "OFF". Disconnect the negative (-) battery cable.

**STEP 8** Refer to **PIC 2**. Attach an included Female T-Tap connector to each turn signal wire and ground wire from **STEP 6**.

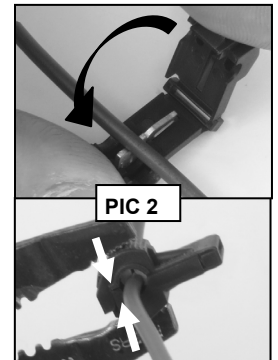

**STEP 9** Refer to **PIC 3**. Crimp an included Male Spade onto each Skeleton Hand Turn Signal wire.

### NOTICE


Dielectric grease inhibits moisture and prevents corrosion. Kuryakyn recommends the use of the included dielectric grease on ALL electrical connections. Apply dielectric grease directly to mating surfaces.

**STEP 10** Refer to **FIG 1** and **PIC 4**. Connect the RED wire from the Skeleton Hand Turn Signal to the T-Tap on the turn signal wire from **STEP 6**.


Connect the BLACK wires to the ground wire from **STEP 6**. Repeat for the other side.

### NOTICE

Secure the wiring away from moving parts, pinch points, or extreme heat. Kuryakyn will not provide warranty coverage on any electrical component that fails due to pinched, crimped, broken, abraded, melted, or frayed wires.



**STEP 11** Reconnect the negative battery cable. Ensure ALL lights operate correctly. Secure the wiring out of harms way.



### WARNING

VISIBILITY IS A **MAJOR CONCERN** FOR MOTORCYCLISTS. A LIGHT MALFUNCTION COULD RESULT IN DEATH OR SERIOUS INJURY. ENSURE PROPER LIGHT OPERATION **BEFORE** RIDING THE MOTORCYCLE.



### NOTICE

Turn signals that blink faster than normal may require the installation of a load equalizer (available at [kuryakyn.com](http://kuryakyn.com)).

### NOTICE

It is the end user's responsibility to ensure that all fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not provide warranty coverage on products or components lost or damaged due to improper installation or lack of maintenance. Periodic inspection and maintenance are required on all fasteners.

#### LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase whereas all other components shall be warranted for one (1) year.
6. Merchandise purchased directly from Internet auction sites or any other third party seller is considered sold as is & shall not carry a Kuryakyn warranty. All warranty claims must be directed to the original seller. If unsure please contact the seller to verify they are an authorized Kuryakyn retailer.

#### RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.