# SCREAMIN' EAGLE VENTILATOR PERFORMANCE AIR CLEANER KIT

## **GENERAL**

#### **Kit Number**

28721-10 (chrome), 28722-10 (black)

#### Models

For model fitment information, see the P&A retail catalog or the Parts and Accessories section of www.harley-davidson.com (English only).

## **Additional Parts Required**

Proper installation of this kit requires the use of Digital Technician<sup>™</sup> by a factory-trained technician at a Harley-Davidson dealer.

This kit requires the use of Loctite<sup>®</sup> 243 Threadlocker and Sealant - Blue (H-D Part Number 99642-97) and Air Cleaner/Degreaser (H-D Part Number 99883-88T), both available from a Harley-Davidson dealer.

# **AWARNING**

The rider's safety depends upon the correct installation of this kit. Use the appropriate service manual procedures. If the procedure is not within your capabilities or you do not have the correct tools, have a Harley-Davidson dealer perform the installation. Improper installation of this kit could result in death or serious injury. (00333a)

#### NOTE

This instruction sheet refers to service manual information. A service manual for this year/model motorcycle is required for this installation and is available from a Harley-Davidson dealer.

#### **Kit Contents**

See Figure 2 and Table 1.

#### NOTES

This Screamin' Eagle Ventilator Performance Air Cleaner is intended for high performance applications only. This enginerelated performance part is legal for sale or use in California on pollution controlled motor vehicles. Engine-related performance parts are intended for the experienced rider only.

The air cleaner contained in this kit is designed to perform with **this kit only**. Any other combination of components is not confirmed to be legal for street use.

# **REMOVAL**

## **A**WARNING

To prevent accidental vehicle start-up, which could cause death or serious injury, remove main fuse before proceeding. (00251b)

- 1. Remove the main fuse. Refer to the service manual.
- Remove the existing air cleaner backplate. Refer to the service manual. Save the original equipment (OE) button head screw that secures the air cleaner cover. Discard the remaining parts.

## **INSTALLATION**

Air Cleaner Installation

## **A**WARNING

Use only supplied air cleaner cover. Use of another air cleaner cover could cause element failure and detachment of the air cleaner cover, which could distract the rider and result in death or serious injury. (00596b)

#### NOTE

When servicing the air cleaner, apply Loctite 243 - Blue to the threads of all fasteners.

- Remove the liner from the adhesive backing of the gasket (11). Carefully position the adhesive side of the gasket to the backplate, aligning to the equally spaced screw holes, and press the gasket firmly into place.
- See Figure 2. Insert the two breather bolts (9) hrough the air cleaner backplate assembly (8) and install two intake tube gaskets (7) to the breather bolts on the induction module side of the backplate assembly.
- 3. Apply Loctite 243 Blue to the breather bolt threads and the mating tapped holes in the cylinder head.
- 4. Thread the bolts into the cylinder head, but do not tighten.
- Thread the air cleaner mounting studs (1) all the way through the backplate (8) until the screw threads are captured in the induction module. Do not tighten completely at this time.
- Alternately tighten the two breather bolts to 120-144 inlbs (13.6-16.3 Nm).
- Tighten the three air cleaner studs to 55-60 in-lbs (6.2-6.8 Nm).

-J04934 1 of 3

 Install the adapter plate assembly (2) to the mounting studs (1) using hex socket button head screws (with Loctite applied). Tighten the screws to 55-60 in-lbs (4.1-6.8 Nm)

### Air Cleaner Element and Cover Installation

#### NOTES

This is a dry air filter. Do not apply oil to the filter element.

Whenever the air cleaner cover is installed, apply Loctite 243 - Blue to the air cleaner cover screw (A).

- See Figure 2. Secure the air filter element (3) to the adapter plate assembly (2) using three hex socket button head screws (6). Tighten the screws to 55-60 in-lbs (6.2-6.8 Nm).
- Apply Loctite 243 Blue to the threads of the OE air cleaner cover screw (A). Secure the air cleaner cover (4) to the air filter element (3) with the screw. Tighten the screw to 36-60 in-lbs (4.1-6.8 Nm).
- Assemble the air cleaner cover insert (12) to the air cleaner cover with two hex socket button head screws (5). Tighten securely.

#### NOTE

Riding a motorcycle equipped with an exposed air filter element under rainy conditions IS NOT RECOMMENDED.

- If parked, water could enter the engine.
- If moving, enough water could be sucked in to cause engine misfiring.

Slip the rain sock (11) over the air filter element under these circumstances.

#### **Final Assembly**

1. Install the main fuse. Refer to the service manual.

#### **ECM Recalibration**

## **CAUTION**

You must recalibrate the ECM when installing this kit. Failure to properly recalibrate the ECM can result in severe engine damage. (00399b)

Have a Harley-Davidson dealer download the new ECM calibration using Digital Technician™.

#### MAINTENANCE


#### **Air Cleaner Element Maintenance**

#### NOTES

This is a dry air filter. Do not apply oil to the filter element.

When servicing the air cleaner, apply Loctite 243 - Blue to the threads of all fasteners.

- See Figure 2. Remove the air cleaner cover (4) and inspect the filter element (3) every 5000 miles (8000 km), or more often under dusty conditions.
- 2. Clean the filter element as follows (see Figure 1):
  - a. Remove and wash the element by immersing it, on edge, in a shallow pan containing enough Air Cleaner/Degreaser (1) to cover no more than threequarters of the depth of the filter pleats (2), about 0.375 inch (9.5 mm). Do not allow dirty solution to get inside the element. Carefully "roll" the element in the solution around its perimeter (3) until the entire outer surface of the filter pleats has been soaked.
  - Remove the filter element from the cleaner/degreaser and allow five minutes for the cleaner to dissolve the dirt.
  - c. From the inside out, rinse the element with cold water. Shake off excess water, and allow the element to air dry. **Do not dry with compressed air.**
- 3. Install the air cleaner element and cover.

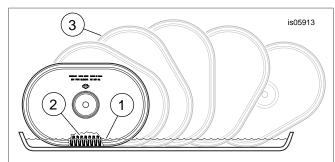

- 1. Air Cleaner/Degreaser solution
- 2. Filter pleats
- 3. Roll filter element in solution around perimeter

Figure 1. Cleaning the Filter Element



-J04934 2 of 3

# **SERVICE PARTS**

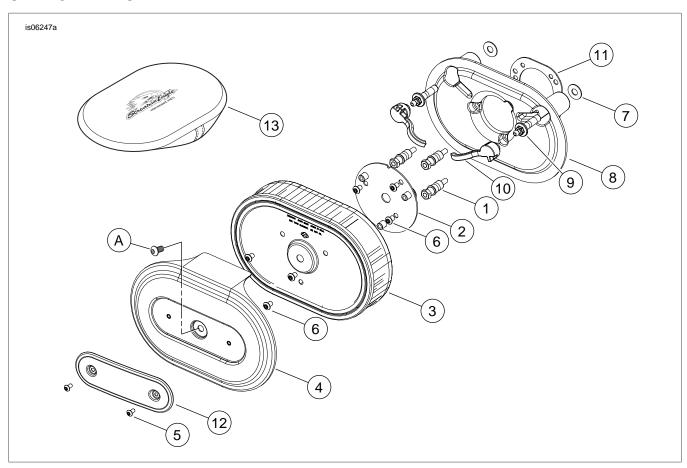


Figure 2. Service Parts: Screamin' Eagle Ventilator Performance Air Cleaner

**Table 1. Service Parts Table** 

Item	Description (Quantity)	Part Number
1	Mounting stud (3)	8250
2	Adapter plate assembly	28101-10
3	Air filter element	29670-09
4	Air cleaner cover	29671-09
5	Hex socket button head screw (2)	3048
6	Hex socket button head screw (6)	3938
7	Intake tube gasket (2)	11934
8	Air cleaner backplate	28723
9	Breather bolt (2)	29465-08
10	Breather plug (2)	29557-05
11	Gasket, carb/efi	29583-01A
12	Air cleaner cover insert	29846-09
13	Rain sock	29762-09
Items mentioned in text, but not included in kit:		
А	Air cleaner cover screw	/ 9

-J04934 3 of 3