



UNDERSEAT PASSENGER PEG MOUNTS—BLACK

4334

PARTS INCLUDED

- 1 Left Under Seat Peg Mount Assembly with Clevis—Black
- 1 Right Under Seat Peg Mount Assembly with Clevis—Black
- 1 Hardware Kit Including:
 - 4 3/8-16 x 1-1/2" Socket Head Cap Screws
 - 4 Hot Spots
 - 1 Anti-Seize
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

TOOLS SUGGESTED


Set of Hex Wrenches, Set of Torx Wrenches

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.

ATTENTION! Be sure to use the supplied anti-seize on all threaded fasteners before installation. This will reduce galling and make future removal of the fasteners easier.

STEP 2 Remove the two Torx head fasteners at the front of the right fender strut. Set aside, they will not be reused. PIC 1

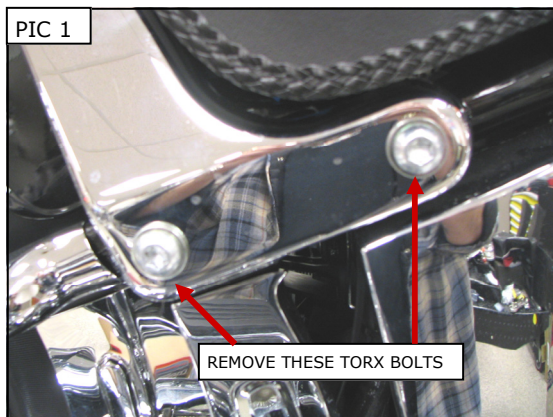

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Küryakyn warrants that any Küryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Küryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
 - The product must be properly installed, maintained and operated under normal conditions.
 - Küryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
 - Küryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Küryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Küryakyn and a customer.
- Küryakyn products are often intended for use in specific applications. Küryakyn makes no warranty if a Küryakyn product is used in applications other than intended.
- Küryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Küryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.
- Küryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Küryakyn. Küryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG


For purchasing Küryakyn® products, you can receive a complete catalog free of charge. Send the Proof-of-Purchase below with your address to: Küryakyn, P.O. Box 339, Somerset, WI 54025. Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Küryakyn® products, the motorcycle parts and accessories designed for riders by riders.


©2005 Küryakyn USA® All Rights reserved.




STEP 3 Determine which Under Seat Peg Mount is for the right side of the bike. PIC 2 The foot peg will mount towards the front of the bike with the bracket mounting holes above it.

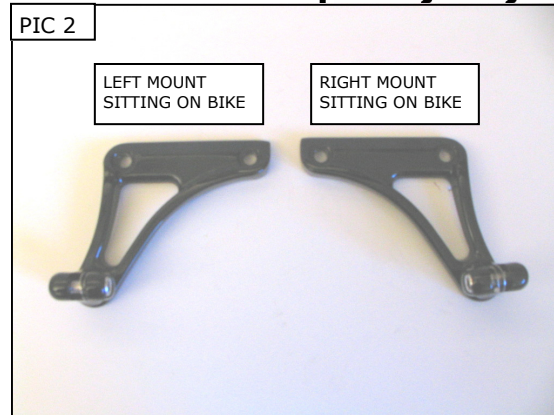


STEP 4 Mount the right side assembly to the frame with the provided 3/8"-16 x 1-1/2" socket head cap screws. PIC 3 Tighten securely. Insert one of the provided Hot Spots in each socket head cap screw.

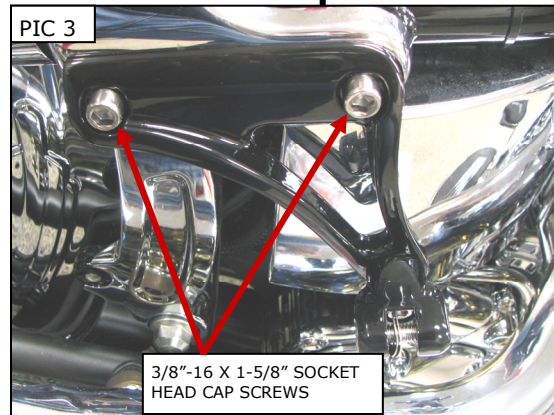

STEP 5 To adjust the angle of the clevis, loosen the 5/16" socket head cap screw in the center of the clevis, set the clevis to the desired angle, and tighten the 5/16" cap screw securely. PIC 4

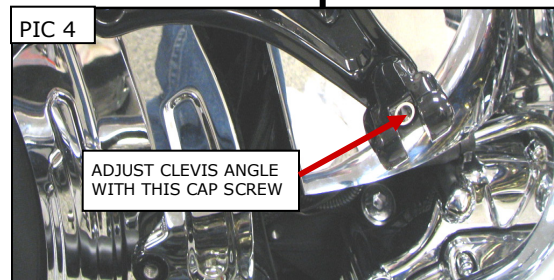

STEP 6 Remove the 3/8" clevis cross bolt from the clevis. Install the male mount foot peg of your choice and the wave washer. (There are two wave washers included for each side, use one or two depending on how tight or loose the male end of the foot peg fits in the clevis) Re-install the cross-bolt and tighten securely. PIC 5

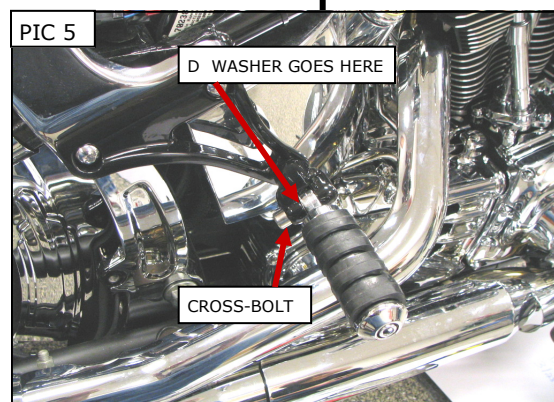

STEP 7 Repeat for Steps 2-5 for the left side.

CAUTION!

Prevent potential injuries! Verify all fasteners are secure before riding.

ATTENTION !

It is the installers' responsibility to make sure all fasteners (including pre-assembled) are tightened before operation of motorcycle. Küryakyn will not warranty components that are lost due to improper installation. Periodic maintenance may be required.