



INSTRUCTIONS

-J04643

REV. 2008-01-14

FRONT AXLE NUT COVER KIT

GENERAL

Kit Numbers

44116-07A, 44117-07A, 44148-07A

Models

For model fitment information, please see the P&A Retail Catalog or the Parts and Accessories section of www.harley-davidson.com (English only).

Kit Contents

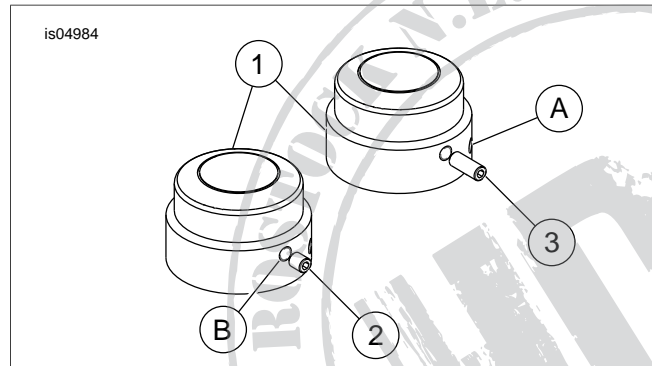


Figure 1. Front Axle Nut Covers

Table 1. Service Parts

Item	Description (Quantity)
1	Cover, front axle nut (2)
2	Set screw, short, axle side
3	Set screw, long, nut side
4	Hex wrench (not shown)
Items referenced in text, but not included in kit:	
A	Mounting hole for 2008-later XL models
B	Mounting hole for all models except 2008-later XL

INSTALLATION

NOTES

It is not necessary to loosen the axle nut when installing these covers.

The axle nut covers set screws are side-specific.

Installing the Axle Nut-Side Cover

1. See Figure 1. Select a cover (1) and the **longer** set screw (2) from the kit.
2. Thread the set screw half-way into the hole (A or B depending on model) and then position the cover over the axle nut.
3. Tighten the set screw securely with the hex wrench (4).

NOTE

Make certain that the set screw is securely fastened to the axle end and that the set screw has not gone into the hole on the side of the axle.

Installing the Axle-Side Cover

1. See Figure 1. Select the remaining cover and the **shorter** set screw (3) from the kit.
2. Thread the set screw half-way into the hole (A or B depending on model) and then position the cover over the axle nut.
3. Tighten the set screw securely with the hex wrench (4).

NOTE

Make certain that the set screw is making contact to a flat surface of the nut.