



INSTRUCTIONS

-J02054

REV. 5-15-00

Kit Numbers 43822-01

HEAD BOLT COVER KIT

General

This kit is designed to fit all 1999 and later models with Twin Cam 88 motor.

Kit contents:

ITEM	DESCRIPTION	PART NO.
1	Head bolt cover	Not sold separately
2	Set screw, 1/4-20 (4)	3231B
3	Allen wrench, 12 hex	94441-82

NOTE

A Service Manual for your motorcycle is available at your Harley-Davidson dealer.


Installation

WARNING

To avoid burns to hands and fingers, do not install Head Bolt Covers until after engine has cooled.

1. Remove spark plugs. Use Service Manual procedure.
2. See Illustration. Install head bolt covers (1), on head bolts (3), tighten using set screw (2) and allen wrench included with kit. To prevent set screws from falling into the spark plug holes, start threading the set screws into the covers before placing them over the head bolts. Position cover on head bolt so that when spark plug is reinstalled set screw is hidden from view but accessible to an allen wrench. Do not tighten set screws on high points of bolts.

i00383-.tif

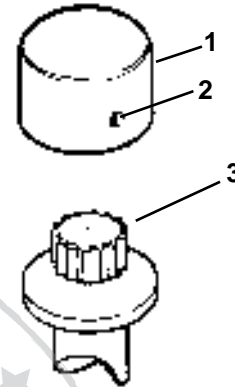

1. Head bolt cover
2. Set screw
3. Head bolt

Head Bolt Cover Installation

3. To assure proper cover position and alignment, the right head bolt cover set screws should be at the ten o'clock position and the left head bolt cover set screws should be at the two o'clock position.
4. Reinstall spark plugs.
5. Readjust set screw tightness after motor has operated at full operating temperature and then cooled.