



# INSTRUCTIONS

-J04643

REV. 2008-01-14

## FRONT AXLE NUT COVER KIT

### GENERAL

#### Kit Numbers

44116-07A, 44117-07A, 44148-07A

#### Models

For model fitment information, please see the P&A Retail Catalog or the Parts and Accessories section of [www.harley-davidson.com](http://www.harley-davidson.com) (English only).

#### Kit Contents

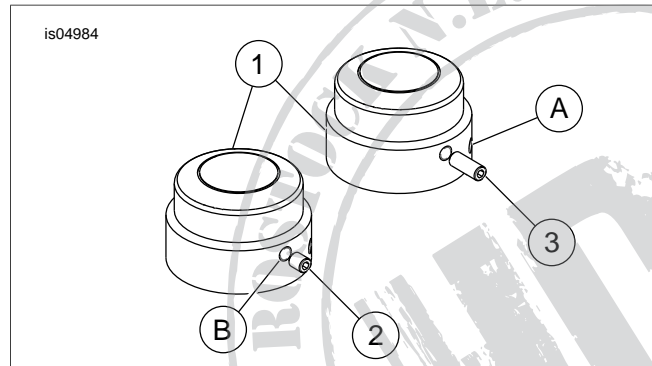


Figure 1. Front Axle Nut Covers

Table 1. Service Parts

Item	Description (Quantity)
1	Cover, front axle nut (2)
2	Set screw, short, axle side
3	Set screw, long, nut side
4	Hex wrench (not shown)
<b>Items referenced in text, but not included in kit:</b>	
A	Mounting hole for 2008-later XL models
B	Mounting hole for all models except 2008-later XL

### INSTALLATION

#### NOTES

*It is not necessary to loosen the axle nut when installing these covers.*

*The axle nut covers set screws are side-specific.*

#### Installing the Axle Nut-Side Cover

1. See Figure 1. Select a cover (1) and the **longer** set screw (2) from the kit.
2. Thread the set screw half-way into the hole (A or B depending on model) and then position the cover over the axle nut.
3. Tighten the set screw securely with the hex wrench (4).

#### NOTE

*Make certain that the set screw is securely fastened to the axle end and that the set screw has not gone into the hole on the side of the axle.*

#### Installing the Axle-Side Cover

1. See Figure 1. Select the remaining cover and the **shorter** set screw (3) from the kit.
2. Thread the set screw half-way into the hole (A or B depending on model) and then position the cover over the axle nut.
3. Tighten the set screw securely with the hex wrench (4).

#### NOTE

*Make certain that the set screw is making contact to a flat surface of the nut.*