



INSTRUCTIONS

-J07073

2015-08-24

REAR GUARD

GENERAL

Kit Number

49000131

Models

For model fitment information, see the P&A retail catalog or the Parts and Accessories section of www.harley-davidson.com (English only).

Installation Requirements

⚠ WARNING

The rider's safety depends upon the correct installation of this kit. If the procedure is not within your capabilities or you do not have the correct tools, have a Harley-Davidson dealer perform the installation. Improper installation of this kit could result in death or serious injury. (00308a)

Kit Contents

See Figure 2 and Table 1.

INSTALLATION

NOTE

Install one side at a time. Removing screws from both sides allow the rear fender to fall.

NOTE

Verify that the spacer between fender and support bracket cover is in place during installation of guard.

1. See Figure 1. Remove two screws (A). Retain screws to return vehicle to original configuration in the future.
2. Install the guard with **new** screws (2, 3). Tighten to 54.2 N·m (40 ft-lbs).
3. Repeat with the opposite side.

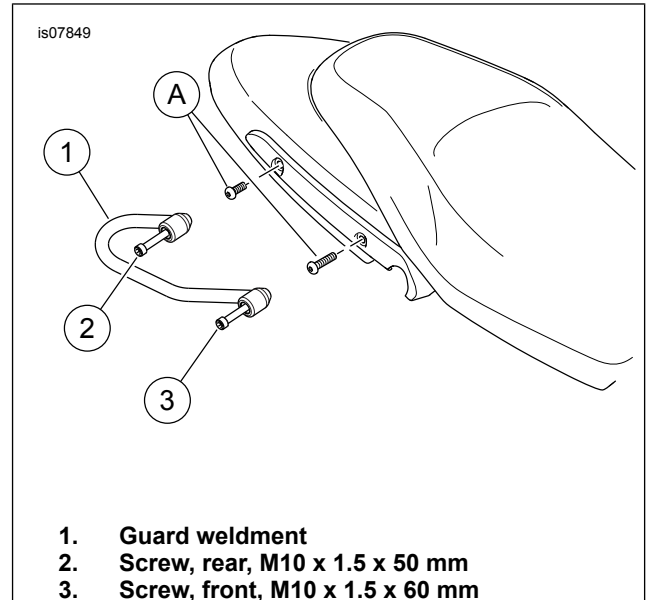


Figure 1. Install Guard

SERVICE PARTS

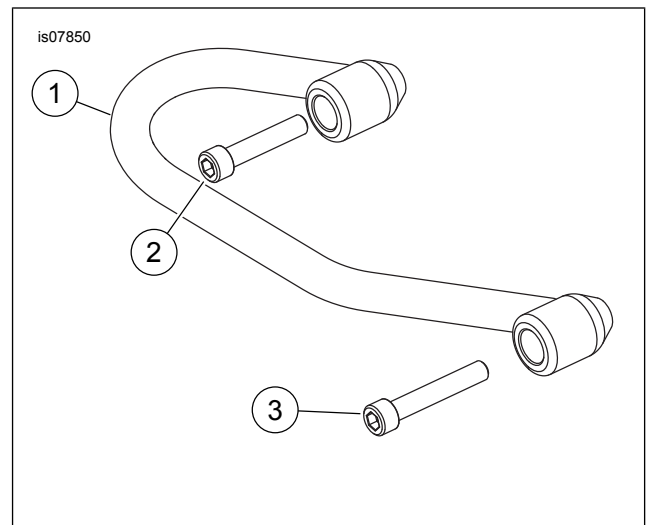


Figure 2. Rear Guard Kit

Table 1. Service Parts

Item	Description (Quantity)	Part Number
1	Guard weldment (2)	Not serviced
2	Screw, rear, M10 x 1.5 x 50 mm (2)	Not serviced
3	Screw, front, M10 x 1.5 x 60 mm (2)	Not serviced
	Service Kit (includes items 1, 2 and 3)	49000122
Items included in text		
A	Fender support screws	

