



INSTRUCTIONS

-J05605

2012-06-05

HARLEY HAMMOCK RIDER TOURING SEAT

GENERAL

Kit Number

52000072, 52000075

Models

For model fitment information, see the P&A Retail Catalog or the Parts and Accessories section of www.harley-davidson.com (English only).

Kit Contents

See Figure 3 and Table 1 for complete kit contents.

REMOVAL

NOTE

When performing the following installation procedures, avoid scratching painted surfaces (fender, tank, etc.) with tools or metal seat tabs.

1. Remove saddlebags from motorcycle. Refer to SADDLEBAGS in applicable service manual. Save all saddlebag mounting hardware for later use.

NOTE

Before removal, note the mounting orientation of grabstrap, saddlebag mounting bracket and hardware.

2. See Figure 1. Remove existing grabstrap (1) from left side of motorcycle by removing screw (2), washer (3) and saddlebag mounting bracket (4) from chrome frame tube cover. Repeat steps for right side of motorcycle.
3. **FLHR Models:**
 - a. Remove the mounting screw from rear of passenger pillion. Pull the pillion rearward from the mounting studs to remove the pillion. Save mounting screw.
 - b. Remove seat mounting nuts that secure the rider seat to the fender. remove the seat from the motorcycle.
4. **FLTR, FLHT/C/U, FLHRC and FLHRS Models:** Remove the mounting screw from rear of seat. Remove seat. Save mounting screw.

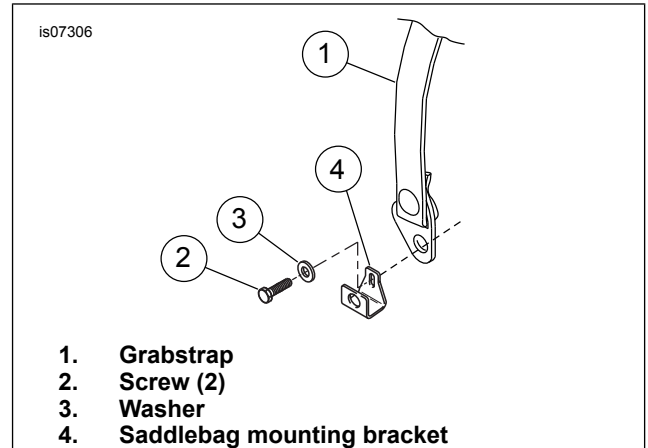


Figure 1. Grabstrap Mounting Orientation

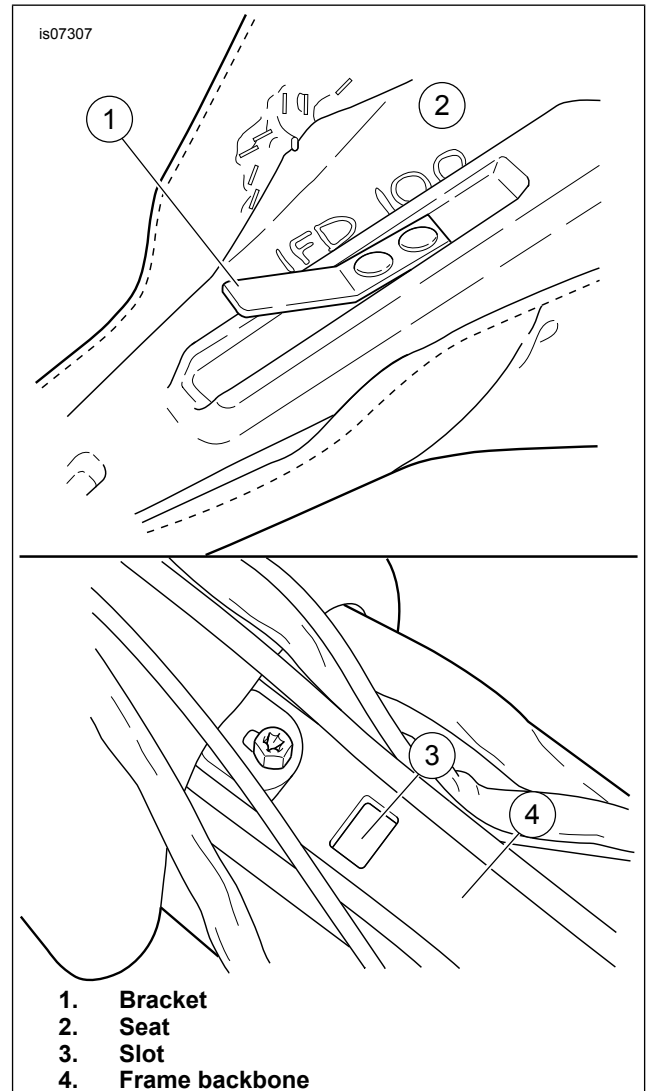


Figure 2. Seat Bracket and Mounting Slot

-J05605

Many Harley-Davidson® Parts & Accessories are made of plastics and metals which can be recycled. Please dispose of materials responsibly.

1 / 2

INSTALLATION

1. See Figure 2. Install **new** seat from kit onto motorcycle, making certain that bracket (1) on front of seat fully engages seat mounting slot (3) in frame backbone (4).
2. Secure the seat to the fender using the screw from step 3 or 4.
3. Attach grabstrap from the kit to the left saddlebag mount using the stock screw and washer. Tighten to 13.6 N·m (120 **in-lbs**).
4. Lay grab strap over the seat. Attach grab strap to right saddlebag mount using stock screw and washer. Tighten to 13.6 N·m (120 **in-lbs**).
5. Install saddlebags. Refer to SADDLEBAGS in applicable service manual.

SERVICE PARTS

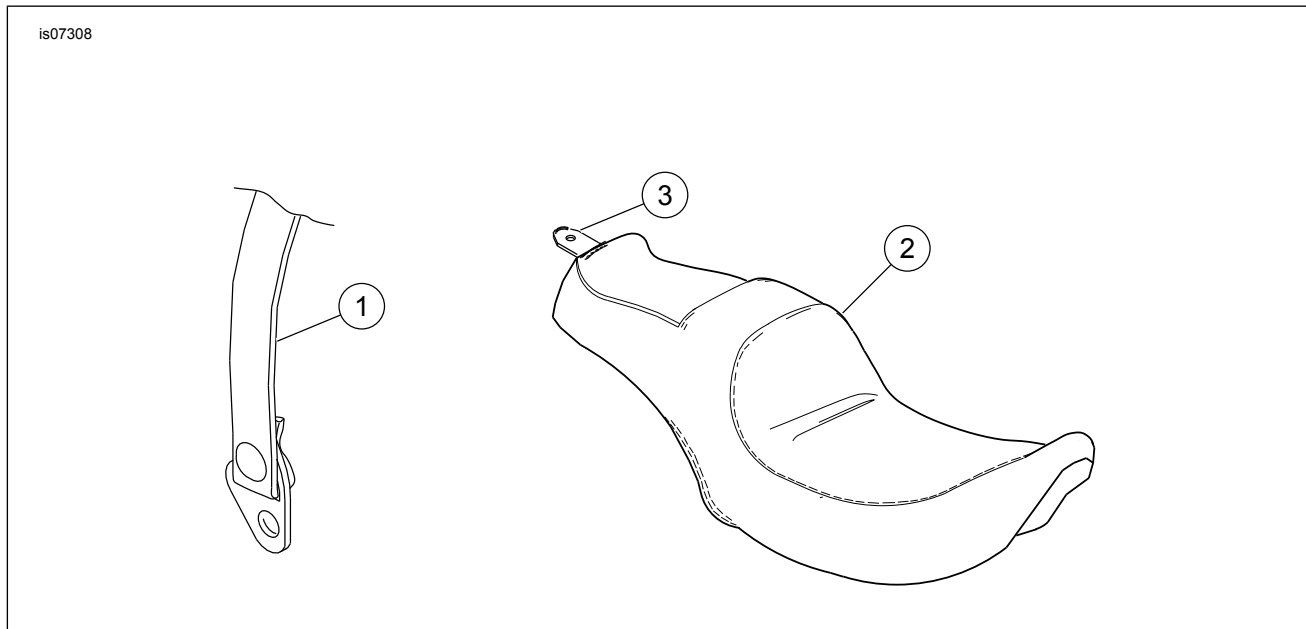


Figure 3. Service Parts: Harley Hammock Seat Kit

Table 1. Service Parts: Harley Hammock Seat Kit

Item	Description (Quantity)	Part Number
1	Grabstrap	52400076
2	Seat	Not sold separately
3	Seat bracket	51652-97A