



# INSTRUCTIONS

-J01471

REV. 01-06-2003

Kit Number 52265-01A

## FLHT/FLTR BADLANDER CUSTOM SEAT

### General

This kit is designed for installation on 1997 and later FLHT/C/U models and 1998 and later FLTR models.

This kit contains the following items:

ITEM	DESCRIPTION	PART NO.
1	Grab strap	51779-98
2	Seat (not shown)	not sold separately

#### NOTE

A Service Manual for your model motorcycle is available from any Harley-Davidson dealer.

### Installation

#### CAUTION

When performing the following installation procedures, be cautious not to scratch painted surfaces (fender, tank, etc.) with metal seat tabs or tools.

1. Remove left and right saddlebags from motorcycle, saving all hardware for reinstallation.

**For FLTR vehicles**, see Figure 1. Remove existing grab strap from left side of vehicle by removing bolt (with flat washer) and forward saddlebag mounting bracket from chrome frame tube cover, noting mounting orientation of grab strap, saddlebag mounting bracket and hardware for reinstallation.

Remove existing grab strap from right side of vehicle in the same manner, noting mounting orientation of grab strap, saddlebag mounting bracket and hardware for reinstallation.

**For FLHT/C/U vehicles**, remove forward saddlebag mounting brackets. Save all hardware for reinstallation.

2. See Figure 1. Secure new grab strap to left side of vehicle by reassembling forward saddlebag mounting bracket and bolt to vehicle in same orientation from which they were removed. Tighten bolt finger tight.
3. **For FLHT/C/U and FLTR vehicles**, remove screw from rear of seat. Remove seat, saving screw. Also remove passenger grab rail if so equipped. Reinstall locknuts on studs.

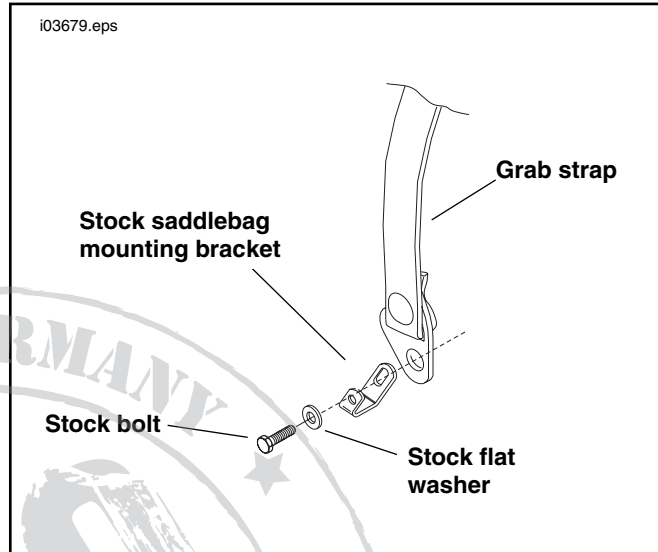


Figure 1. Vehicle Grab Strap Mounting Orientation

4. Install new seat from kit onto motorcycle, making certain that bracket on front of seat fully engages into seat mounting tab on frame.
5. Secure seat onto rear fender using screw saved in step 3.

#### WARNING

After installing seat, pull upward on front of seat to be sure it is in locked position. While riding, a loose seat can shift causing loss of control, which could result in death or serious injury. (00070a)

7. See Figure 1. Secure new grab strap to right side of vehicle by reassembling forward saddlebag mounting bracket and bolt to vehicle in same orientation from which they were removed. Tighten bolt finger tight.
8. Reposition saddlebags (left and right) into place and secure.
9. With saddlebags in position, tighten forward saddlebag mounting bolts to 10 ft-lbs (13.6 Nm).