



INSTRUCTIONS

-J01198

REV. 1-23-98

Kit Number 59005-98

ROAD KING CLASSIC FRONT FENDER SKIRT

General

This kit is designed for the front fenders on the following models:

- 1994 and later FLHR and FLHRC models
- 1987 to 1996 FLT models
- 1987 and later FLH models

This kit is **not** designed for FLSTF model vehicles.

QTY	DESCRIPTION
1	Fender skirt
6	Screws
6	Locknuts
6	Washers
1	Adhesive foam strip

Installation

1. See illustration. Remove fasteners from stock fender skirt.

CAUTION


Some early models have rivets for fasteners. These rivets will need to be drilled out. Drill the rivet heads to a sufficient depth to remove the head from the rivet shaft. Do not attempt to drill the rivet all the way through. This may scratch the fender's painted surface.

2. Remove stock fender skirt.
3. Thoroughly clean the fender under the skirt. At this point it may be a good idea to wax this portion of the fender to prevent rust in the future.
4. Cut the adhesive foam strip into three equal parts. Remove the backing from the adhesive strips and apply adhesive on middle and two sides at the inside/bottom of the skirt. The foam strips will prevent rattling and unwanted noise.

NOTE

On some later FLT models, there may not be enough fender skirt support to allow the application of adhesive strips. If this is true for your motorcycle, you may install this kit without the adhesive strips.

5. Place the fender skirt in position, aligning fastener holes.
6. Install the screws from the outside of the fender. Install the washers and nuts inside the fender.

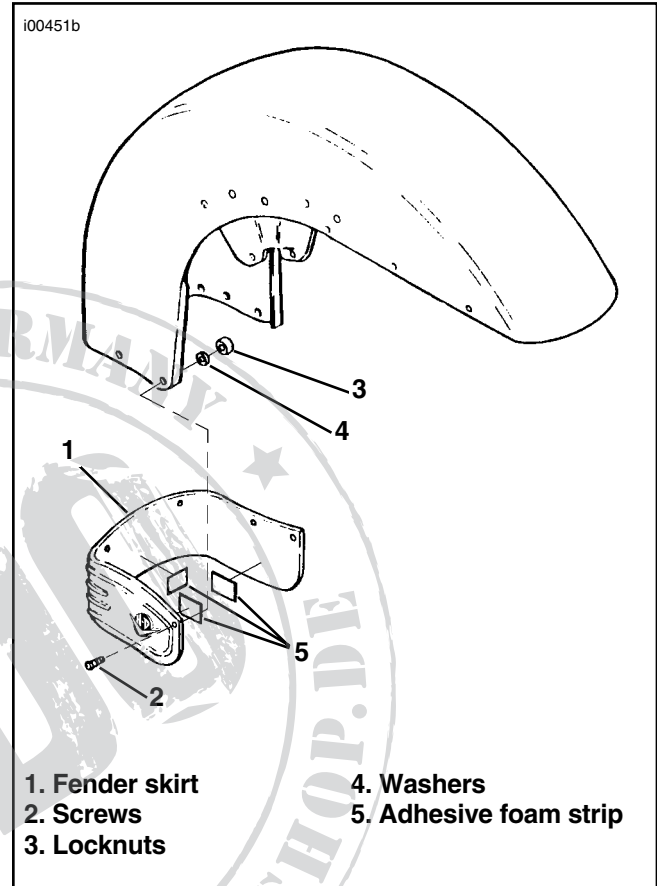

Front Fender Skirt and Assembling Hardware