



INSTRUCTIONS

-J03364

2008-12-09

SMOKED AND CLEAR FENDER TIP LENS KITS

GENERAL

Kit Number

59380-05 (smoked), 59381-05 (clear), 59336-09 (smoked), 59337-09 (clear), 59338-09 (smoked), 59448-09 (clear)

Table 1. These kits are made from the following items:

| QTY | Description (Quantity) | Part Number |
|-----|---------------------------|-------------|
| 1 | Front lens cover (smoked) | 59773-05 |
| 1 | Rear lens cover (smoked) | 59771-05 |
| 1 | Front lens cover (clear) | 59774-05 |
| 1 | Rear lens cover (clear) | 59772-05 |
| 1 | Front LED lamp (amber) | 59767-05 |
| 1 | Rear LED lamp (red) | 59763-05 |

Models

For model fitment information, see the P&A Retail Catalog or the Parts and Accessories section of www.harley-davidson.com (English only).

NOTICE

It is possible to overload your vehicle's charging system by adding too many electrical accessories. If the combined electrical accessories operating at any one time consume more electrical current than the vehicle's charging system can produce, the electrical consumption can discharge the battery and cause damage to the vehicle's electrical system. See an authorized Harley-Davidson dealer for advice about the amount of current consumed by additional electrical accessories or for necessary wiring changes. (00211c)

NOTE

These lamps require 0.05 amps of available current from the motorcycle's electrical system for each the front and rear lamp (0.10 amps total).

INSTALLATION

⚠ WARNING

To prevent accidental vehicle start-up, which could cause death or serious injury, disconnect negative (-) battery cable before proceeding. (00048a)

⚠ WARNING

Disconnect negative (-) battery cable first. If positive (+) cable should contact ground with negative (-) cable connected, the resulting sparks can cause a battery explosion, which could result in death or serious injury. (00049a)

1. Disconnect the battery cables, negative cable first.

2. See Figure 1. Insert blade of small screwdriver into slot at top of front fender tip lamp lens (2). Rotate end of screwdriver to unsnap lens from lamp bracket. Repeat for rear fender tip lamp lens.

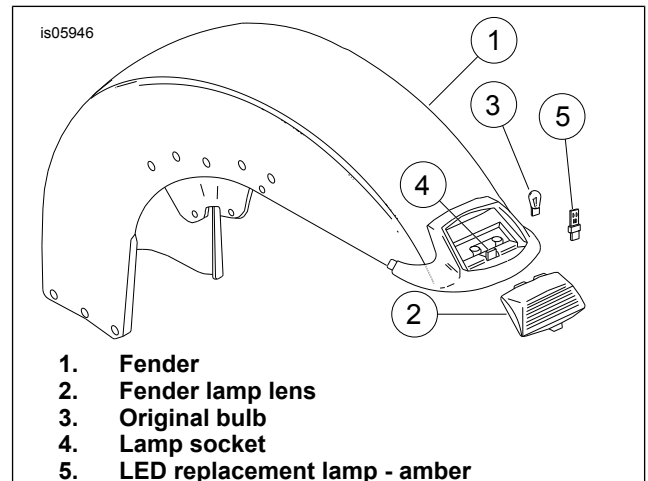


Figure 1. Front Fender Assembly

3. Remove bulb (3) from socket (4).
4. From the kit, find the LED marked "Amber" (5) and install into front fender tip lamp socket.
5. From the kit, find the LED marked "Red" and install into rear fender tip lamp socket.
6. Connect the battery cables, positive cable first.

NOTE

If either lamp fails to illuminate, shut off power, remove lamp and install in opposite direction. Retest fender tip lamps for proper function.

7. Apply power and check for proper function of front and rear fender tip lamps.
8. From the kit, find the front lens cover and install into front lamp bracket. The front lens is identified with the markings PM 1735-15.
9. From the kit, find the rear lens cover and install into rear lamp bracket. The rear lens is identified with the markings PM 1736-15.

