



INSTRUCTIONS

-J05639

2012-05-25

7-INCH HEADLAMP BURST COLLECTION TRIM RING

GENERAL

Kit Number

61400149

Models

For model fitment information, see the P&A Retail Catalog or the Parts and Accessories section of www.harley-davidson.com (English only).

Kit Contents

There are no service parts available for this kit.

Table 1. Kit Contents

Item	Description	Part Number
1	Screw, hex socket head, #6-32 x 0.50 in	Not Sold Separately
2	Trim Ring	Not Sold Separately

INSTALLATION

1. Remove original equipment (OE) trim ring and screw.
2. See Figure 1. Slip new trim ring (2) over OE headlamp housing. The lip on the back of the trim ring should slip between headlamp housing and the fairing.
3. Position mounting screw (1) at bottom of headlamp.
4. Tighten accessory trim ring screw to 1–1.7 N·m (9–15 in-lbs).

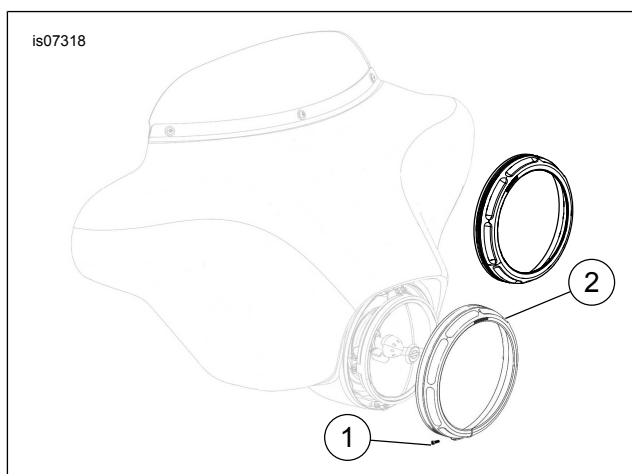


Figure 1. Burst Collection Trim Ring

