



# INSTRUCTIONS

-J06033

2014-09-03

## RADIO BEZEL KIT

### GENERAL

#### Kit Number

61400298

#### Models

For model fitment information, see the P&A Retail Catalog or the Parts and Accessories section of [www.harley-davidson.com](http://www.harley-davidson.com) (English only).

#### Kit Contents

See Figure 1.

### INSTALLATION

#### NOTE

- Ambient temperature should be between 21 °C (70 °F) and 38 °C (100 °F) for proper adhesion. Do not apply below 10 °C (50 °F)
- Allow AT LEAST 24 hours after application before exposing the area to vigorous washing, strong water spray or extreme weather.

- The adhesive bond will increase to maximum strength after about 72 hours at normal room temperature.

#### NOTE

Do not clean with denatured alcohol, mineral spirits or other solvents. Damage to components may occur.

1. Using a 50:50 isopropyl alcohol/water solution, thoroughly clean mounting surface. Allow to dry completely.
2. See Figure 1. With the adhesive backing still in place, test fit the radio bezel to mounting location on inner fairing.

#### NOTE

The part cannot be repositioned after initial installation.

3. Remove the adhesive backing. Install the radio bezel to the inner fairing.
4. Press surface of bezels firmly to make sure that there is good adhesion.

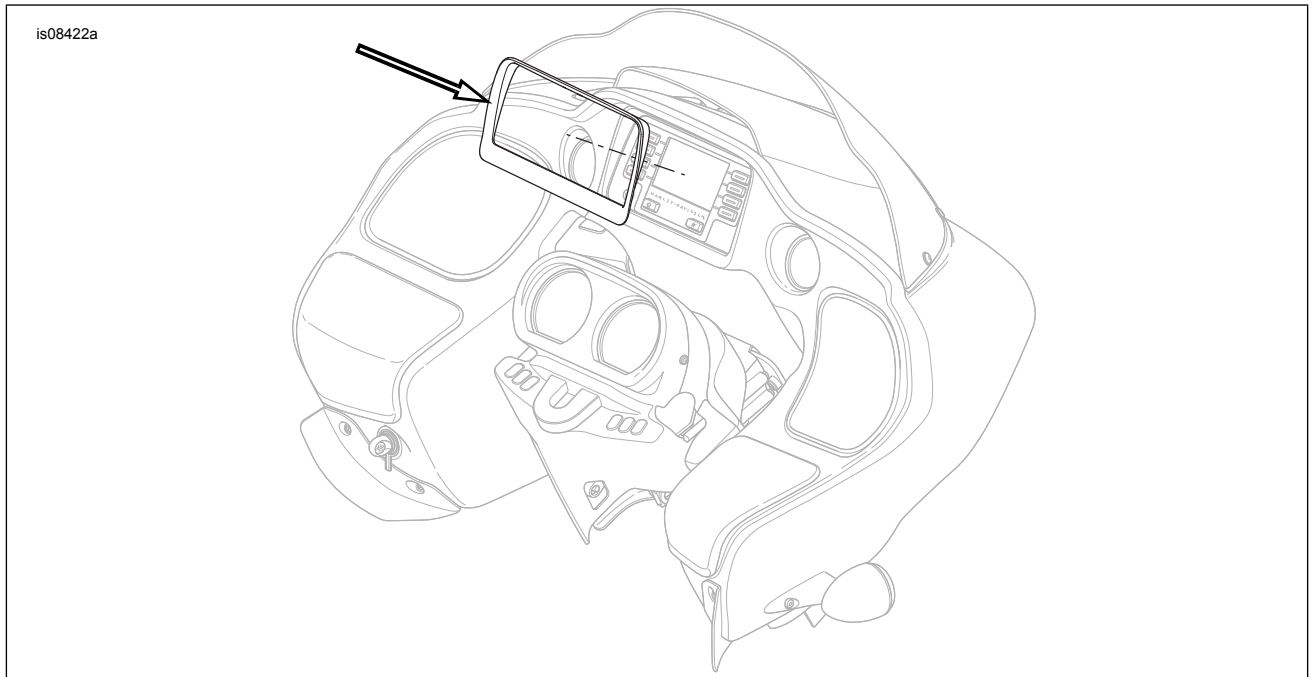


Figure 1. Radio Bezel