



INSTRUCTIONS

-J02895

REV. 4-26-03

Kit Number 62028-04

2004 DYNA TANK BRA KIT

General

This kit is designed for installation on 2004 Dyna model motorcycles with Original Equipment fuel tank.

Kit Contents

Qty	Description	Part Number
1	Bra, fuel tank (Dyna)	62028-04

NOTE

A Service Manual for your motorcycle is available at your Harley-Davidson Dealer.

Installation

CAUTION

To avoid scratching the fuel tank finish, first wash and wax tank. Before placing bra on tank, check to make sure that the bra liner is free from any foreign objects that may scratch the tank surface.

NOTE

When performing the following step, make sure the elastic strap does not pinch or restrict the fuel tank vent hose. If the fuel tank vent hose becomes pinched or restricted, the vent hose will not vent properly.

1. See Figure 1. Beginning at the front of the tank, position the elastic strap over front edge of fuel tank against frame backbone making sure elastic strap does not pinch off fuel tank vent tube located underneath left side of tank. When properly positioned, strap will run down front of tank and along bottom toward rear of tank. Adjust, if necessary. Pull bra to the rear of tank and fit bra snugly around rear of tank.

WARNING

When performing the following step, route the elastic strap and steel "S" hook between the main wiring harness and the frame backbone. If the strap is not routed between the main harness and frame backbone, the hook could eventually cut into main harness wiring causing electrical system failure which could result in death or serious injury.

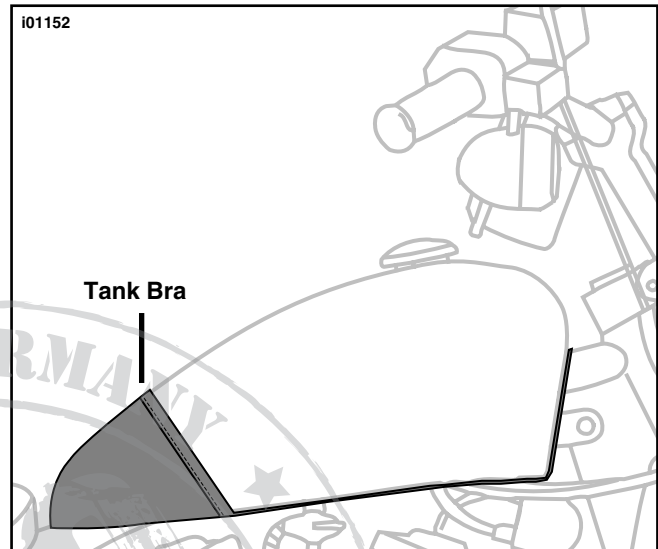


Figure 1. Tank Bra Installed (Typical)

2. Position the rear elastic strap around the frame backbone making sure the strap and "S" hook, when fastened, pass between the main wiring harness and frame backbone.
3. Smooth out any wrinkles in bra.

NOTE

If bra becomes soaked, it should be removed and allowed to air dry.