



INSTRUCTIONS

-J05093

REV. 2009-12-04

OIL CATCHER

GENERAL

Kit Number

63794-10

Models

For model fitment information, see the P&A Retail Catalog or the Parts and Accessories section of www.harley-davidson.com (English only).

Kit Contents

This kit contains one oil catcher and hose.

There are no service parts available with this kit.

SETUP

1. **For XL and XR models:** See Figure 1. Modify the oil catcher as follows:
 - a. Cut the oil catcher with a utility knife along the cut out line (1) which is visible on the bottom of the oil catcher.
 - b. Use a 5/16 in. drill bit and drill through the oil catcher at the drill point (2). Use a utility knife to remove any excess material to the edge of the oil catcher.
2. Attach drain hose to oil catcher.

OPERATION

NOTE

Refer to the owner's manual for oil change procedure.

1. See Figure 2. Loosen oil filter (1) before inserting oil catcher (2) beneath it.
2. Insert oil catcher under the filter and slide it all the way back to the oil filter base.
3. Place a suitable container under the drain hose to collect waste oil.
4. Remove oil filter. Dispose of filter and waste oil properly.

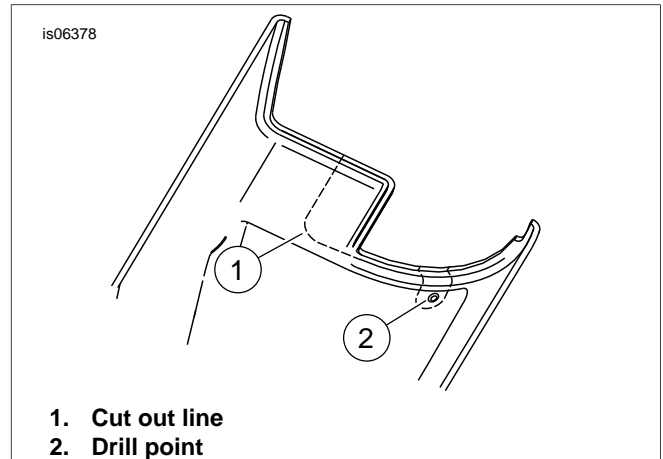


Figure 1. XL and XR Model Cut Outs

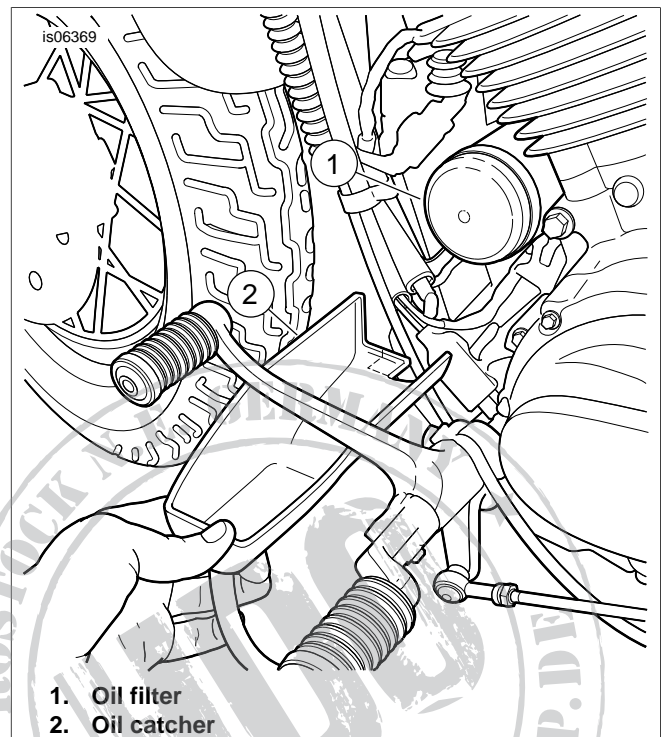


Figure 2. Oil Catcher