

INSTALLATION INSTRUCTIONS

MESH FRONT CALIPER COVERS FOR TOURING, SATIN BLACK

6539

THANK YOU FOR CHOOSING KURYAKYN!

Protect yourself and others from possible injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

WARNING THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN MINOR OR MODERATE POTENTIAL INJURY.

NOTICE THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN MAY NEGATIVELY AFFECT PRODUCT PERFORMANCE AND FUNCTIONALITY OR DAMAGE THE PRODUCT ITSELF OR THE PRODUCT TO WHICH IT IS BEING ATTACHED.

ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- 1 Right Caliper Cover
- 1 Left Caliper Cover

YOU WILL ALSO NEED:

12 Point Socket and Ratchet Set, ft-lbs (Nm) torque wrench

PICTURES SHOWN ARE OF THE CHROME PARTS. INSTALLATION OF THE BLACK PARTS WILL BE THE SAME.

NOTICE THESE INSTALLATION INSTRUCTIONS CONTAIN IMPORTANT INFORMATION. ENSURE THE END USER RECEIVES THIS COPY AND IS AWARE OF ITS IMPORTANCE FOR FUTURE USE.

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let motorcycle cool.

NOTICE A FACTORY SERVICE MANUAL MAY BE HELPFUL IN PERFORMING THIS INSTALLATION. DO NOT ATTEMPT TO PERFORM THIS INSTALLATION IF YOU ARE NOT CONFIDENT IN YOUR ABILITY TO COMPLETE ALL OF THE STEPS IN THE PROCEDURE; CONSULT A TRAINED TECHNICIAN.

STEP 2 Refer to PIC 1. Starting on the left (clutch) side, remove the upper and lower front caliper mounting screws. Set screws aside, they will be reused.

STEP 3 For motorcycles equipped with ABS:
Carefully cut the cable straps that connect the front wheel speed sensor (WSS) cable to the brake line or the fender tip lamp cable.


Release sensor cable from caliper bracket.

Note: Refer to your motorcycle's service manual for assistance.

OPTION 1: LEFT (CLUTCH) SIDE INSTALLATION

STEP 4 Refer to PIC 2 and 3. Locate the provided Left Caliper Cover, and the two (2) screws that were removed in Step 2. Align the mounting holes of the cover with the left fork leg mounting holes. Be sure the sensor wire is positioned behind the caliper cover and not kinked or pinched by any parts. Insert the screws through the mounting holes and lightly tighten them. Check the bottom of the caliper cover to make sure you have clearance from the brake rotor and tire valve stem and verify the WSS cable moves freely. Fully tighten screws.

TORQUE VALUE FOR MOUNTING SCREWS:
28-38 FT-LB (37.9-51.5 NM)

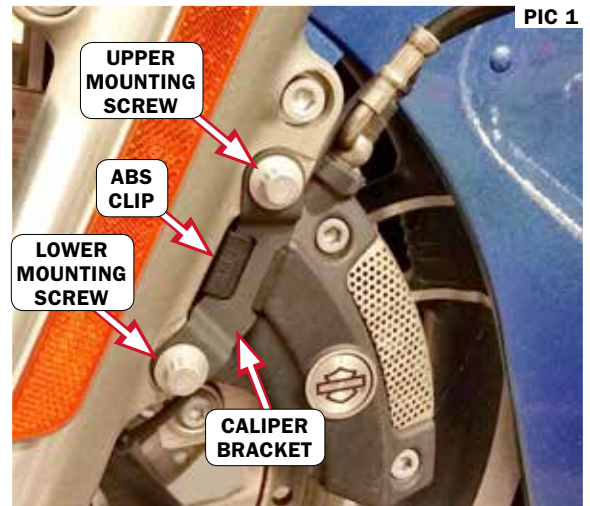

KURYAKYN.COM

866 277 9598 | INFO@KURYAKYN.COM

454 COUNTY ROAD VV SOMERSET, WI 54025

INSTALLATION INSTRUCTIONS

MESH FRONT CALIPER COVERS FOR TOURING, SATIN BLACK

6539

-CONTINUED-

- STEP 5** Secure the WSS cable to the brake line, or to the front fender tip lamp wires. Be sure the sensor cable is not kinked, pinched, or comes in contact with operating parts that could damage the wire.



OPTION 2: LEFT (CLUTCH) SIDE INSTALLATION

- STEP 6** Refer to PIC 5. Locate the ABS retaining clip and bracket. Turn the bracket upside-down so that it's embossed. Install the ABS clip in the reverse order from how it was disassembled.

Note: Refer to your motorcycle's service manual for assistance.

- STEP 7** Locate the provided Left Caliper Cover, and the two (2) screws that were removed in Step 2. Align the mounting holes of the sensor bracket, the caliper cover, and the left fork leg. Insert the screws through the mounting holes and lightly tighten them. Check the bottom of the caliper cover to make sure you have clearance from the brake rotor and tire valve stem. Fully tighten screws.


TORQUE VALUE FOR MOUNTING SCREWS:
28-38 FT-LB (37.9-51.5 NM)

- STEP 8** Secure the WSS cable to the brake line, or to the front fender tip lamp wires. Be sure the sensor cable is not kinked, pinched, or comes in contact with operating parts that could damage the wire.

RIGHT (BRAKE) SIDE INSTALLATION

- STEP 9** Remove the upper and lower front caliper mounting screws. Set screws aside, they will be reused.

- STEP 10** Refer to PIC 6. Locate the provided Left Caliper Cover, and the two (2) screws that were removed in Step 2. Align the mounting holes of the caliper cover and the left fork leg. Insert the screws through the mounting holes and lightly tighten them. Check the bottom of the caliper cover to make sure you have clearance from the brake rotor and tire valve stem. Tighten the bolts to the factory torque specs.

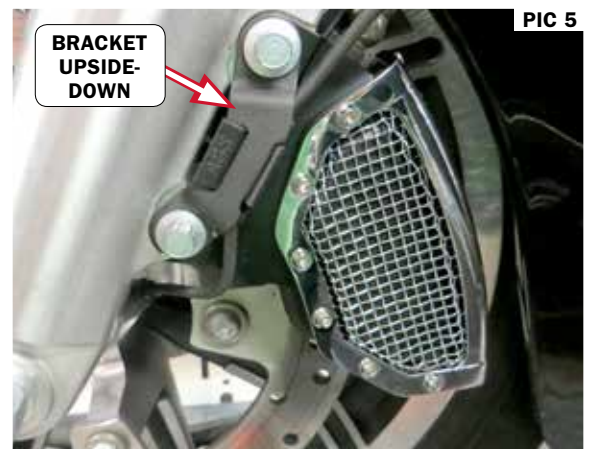

NOTICE

IT IS THE INSTALLER'S RESPONSIBILITY TO ENSURE THAT ALL OF THE FASTENERS (INCLUDING PRE-ASSEMBLED) ARE TIGHTENED BEFORE OPERATION OF THE MOTORCYCLE. KURYAKYN WILL NOT PROVIDE WARRANTY COVERAGE ON PRODUCTS OR COMPONENTS LOST DUE TO IMPROPER INSTALLATION OR LACK OF MAINTENANCE. PERIODIC INSPECTION AND MAINTENANCE ARE REQUIRED ON ALL FASTENERS.



INSTALLATION INSTRUCTIONS

MESH FRONT CALIPER COVERS FOR TOURING, SATIN BLACK

6539

-CONTINUED-

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase whereas all other components shall be warranted for one (1) year.
6. All warranty claims must be directed to the place of purchase. Merchandise sold through internet auction sites or any other unauthorized reseller shall not carry a Kuryakyn warranty. If unsure, please contact the place of purchase to verify they are an authorized Kuryakyn reseller.

RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.

©2015 KURYAKYN HOLDINGS, LLC ALL RIGHTS RESERVED

KURYAKYN, KURYAKYN K logo and the marks appearing on this instruction sheet are registered and common law trademarks of Kuryakyn Holdings except noted third-party trademarks. A full listing of trademarks and trademark registrations owned by Kuryakyn Holdings can be found at www.kuryakyn.com/legal-notice.

Emissions Notice: The California Air Resources Board (CARB) does not permit the use of aftermarket emission-related parts(s) that alter the performance of OEM emission-related devices unless CARB has issued an Executive Order, other than on racing vehicles on closed courses. Check your local laws and manufacturer's information.

Listed Manufacturers and product model names are for reference only. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. All specifications are subject to change without notice.

For additional information on third-party product and company names, please consult our Web page at www.kuryakyn.com/legal-notice