



INSTRUCTIONS

-J05908

2013-10-15

EXHAUST SHIELD KIT

GENERAL

Kit Number

65400167

Models

For model fitment information, see the P&A Retail Catalog or the Parts and Accessories section of www.harley-davidson.com (English only).

Kit Contents

See Figure 1 and Table 1.

▲ WARNING

The rider's safety depends upon the correct installation of this kit. If the procedure is not within your capabilities or you do not have the correct tools, have a Harley-Davidson dealer perform the installation. Improper installation of this kit could result in death or serious injury. (00308a)

INSTALLATION

Remove Original Equipment (OE) Exhaust Shields

1. Allow the motorcycle to cool.
2. Record the position of the OE band clamp screws securing the exhaust shields to the exhaust pipes.
3. See Figure 1. Loosen intermediate shield (A) clamps (B).
4. Open the five band clamps (C) Securing the front and rear shields. Spread the bands and remove exhaust shields from the exhaust.
5. Transfer the band clamps (C) to the **new** exhaust shields (1, 2) in the orientation recorded during removal.

Install New Exhaust Shields

1. See Figure 1. Install the shields on the exhaust pipes. Tighten the band clamps enough to hold the exhaust shields in place.
2. Adjust the shields and band clamps to avoid contact with other components.
3. Tighten all clamp screws.

NOTICE

Wipe all fingerprints off of exhaust system components after installation and before starting engine. Oil from hands can leave permanent marks on exhaust system finish. (00346a)

4. Wipe off all fingerprints. Oil from hands will burn permanently into finish.

SERVICE PARTS

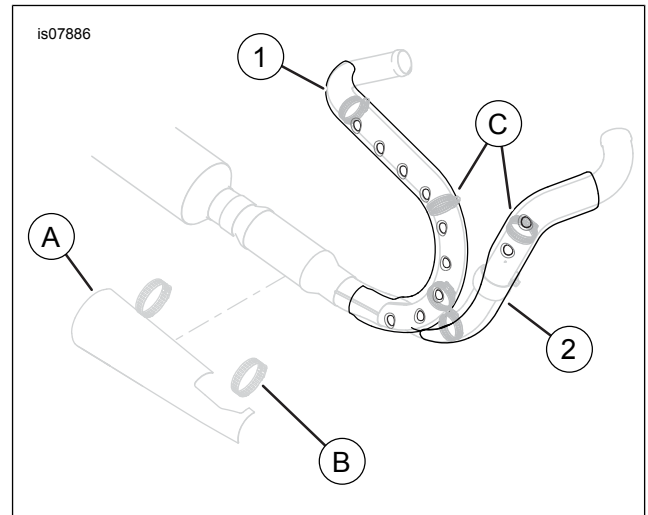


Figure 1. Service Parts: Exhaust Shield Kit

Table 1. Kit Contents

Item	Description (Quantity)	Part Number
1	Rear shield	not serviced separately
2	Front shield	not serviced separately
Items mentioned but not included in kit		
A	Intermediate shield	
B	Band clamps, intermediate shield (2)	
C	Band clamps, front and rear shields (5)	