



# INSTRUCTIONS

-J00419

REV. 9-1-95

Kit Number 67761-96

## FLHR (ROAD KING) HEADLAMP VISOR MOUNTING KIT

### General

This kit is designed to install a headlamp visor (a separate kit purchase) on 1994 and later Road King model motorcycles equipped with a 7 inch headlamp.

Kit contents:

QTY	DESCRIPTION
2	Spring clips
1	Visor mounting pad

No Service Parts are available for this kit.

### Installation

- See Figure 1. Attach the headlamp visor mounting pad (1) to the underside of the headlamp visor within approximately 1/16 of an inch of visor lip.

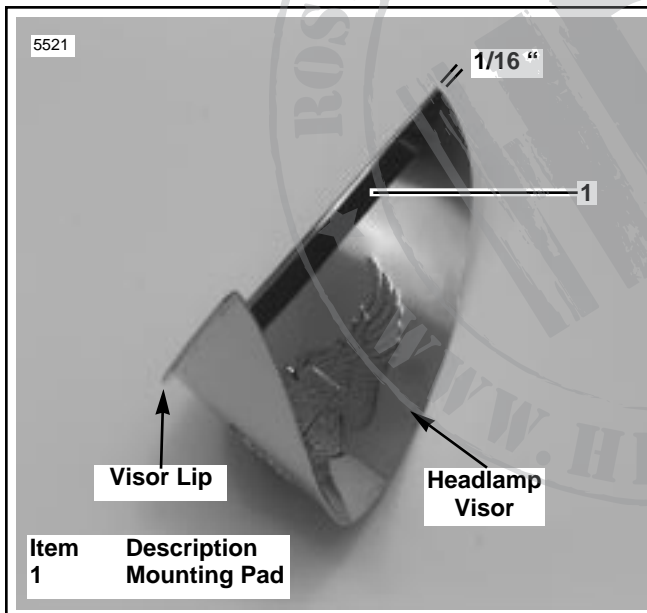


Figure 1. Visor Mounting Pad Attachment to Visor

**NOTE**

Your vehicle is already equipped with a headlamp door (trim ring).

- Remove headlamp door (trim ring) by removing screw at bottom of headlamp. Do not discard screw.

- See Figures 2 and 3. Place a spring clip (1) inside of trim ring, on each side of the stock clip, equally spaced as shown.

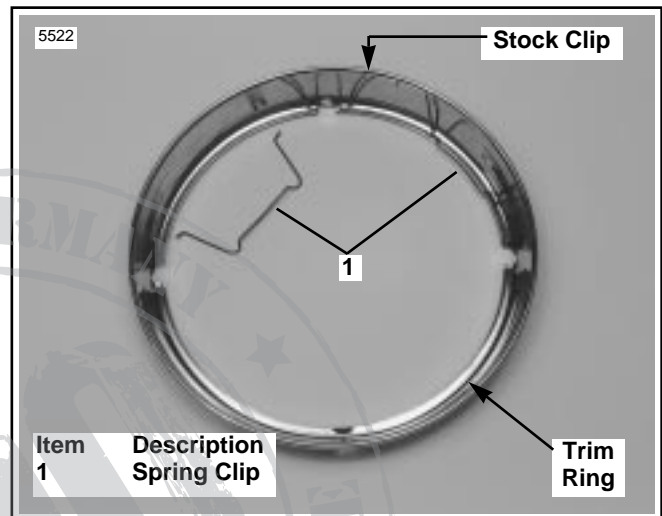


Figure 2. Spring Clips and Trim Ring

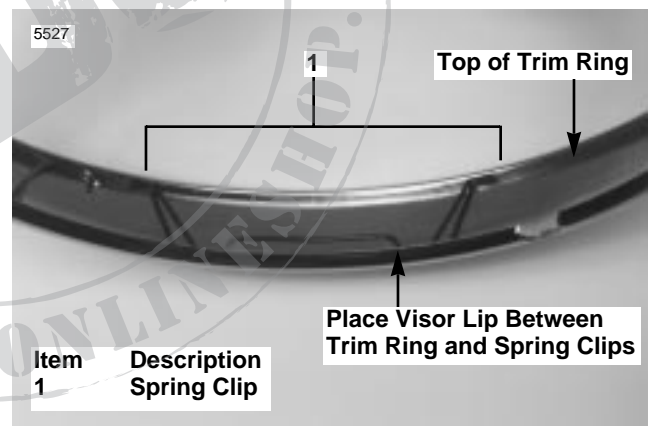


Figure 3. Spring Clip/Visor Placement

- Place visor lip between bottom of trim ring and spring clips. Center the visor to the stock clip at top of trim ring.
- While holding visor in trim ring, push the trim ring back on headlamp.
- Reattach trim ring to headlamp frame with screw removed in step 2.
- If necessary, re-aim headlamp. Refer to the appropriate Service Manual for detailed procedures.

**NOTE**

A Service Manual for your vehicle is available from your Harley-Davidson dealer.