



LUGGAGE RACK

7152

FOR FLHX, FLHR, FLTR, FLHT STANDARD

FITS: '06-UP FLHX, '97-UP ROAD KING (EXCEPT '07-UP FLHRSE) '98-UP ROAD GLIDE, '97-UP FLHT STANDARD

NOTE: INSTALLATION ON ROAD KING, ROAD GLIDE, OR FLHT STANDARD REQUIRES RELOCATION OF LICENSE PLATE.

PARTS INCLUDED

- 1 Luggage Rack
- 3 Clamp Kits, each including:
 - 1 Top
 - 1 Bottom
 - 2 #10 Med. Split Lock Washers
 - 2 10-24 x 3/4 Button Socket Cap Screws (BSCS)
 - 1 1/4-20 x 3/4 Socket Head Cap Screws (SHCS)
- 2 Hole Caps
- 1 Alcohol Pads
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

TOOLS SUGGESTED

Set of hex wrenches.

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

PROCEDURE

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.

STEP 2 Remove the saddlebags and set them out of the way on a soft and clean cloth so they will not be scratched or damaged.

STEP 3 Remove the radio antenna from the motorcycle to ease the installation of the rack.

-cont.-

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Kuryakyn product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA All Rights reserved.



NOTE STEP 4, STEP 5 & STEP 6 ARE ONLY FOR INSTALLATION ON ROAD KINGS, ROAD GLIDES, OR FLHT STANDARD.

Küryakyn

STEP 4 Remove the license plate and mounting bracket from the support bar. License plate will need to be relocated using Küryakyn P/N 2098 (not included) or similar license plate relocating product.

STEP 5 Clean the area around the license plate mounting holes on the support bar with the included alcohol-cleaning pad, allowing the area to fully dry.

ATTENTION! Ensure the area of installation is free of grease, oil, dirt or other debris to ensure proper adhesion. Küryakyn WILL NOT warranty any parts lost due to improper installation.

ATTENTION! The adhesive will not bond correctly if applied at temperatures less than 50°F. Do not attempt this installation in temperatures less than 50°F.

STEP 6 Using the back of your fingernail, rub the backing of the adhesive pad in the hole cap to activate the catalyst. Remove the backing from the adhesive pad and place the cap over one of the mounting holes on the support bar. (See PIC.1.) Repeat this process for the other hole cap.

STEP 7 The luggage rack offers two different mounting positions, however we recommend the forward position as indicated by the circles in PIC.2. The other mounting position can be used if there is not proper clearance between the seat, sissy bar or any other installed accessories.

STEP 8 Loosely install the mounting brackets as shown in PIC.3, using the 10-24 x 3/4 BSCS screws and #10 lock washers from the hardware kit. Place the lock washer and the screw in the mount clamp and thread into the rack.

NOTE Do not fully tighten the screws securing the clamps to the rack, as they need to be left loose to achieve proper alignment.

STEP 9 Place the rack on the support bar and determine proper spacing for mounting clamps. Also, check for clearance between the rack and the seat, sissy bar or any other installed accessories.

STEP 10 Make sure the rack is straight on the bike.

STEP 11 Once placement of the clamps has been determined, snug the screws holding the clamps to the rack.

STEP 12 Remove the rack and tighten all of the screws that secure the placement clamps to the rack.

STEP 13 Hold the rack upside down, off to one side of the support bar, place the bottom half of the clamp assembly on the clamp-mounting arm over the support bar, and start a 1/4"-20 x 3/4" SHCS screw from the hardware kit. (See PIC.4.)

STEP 14 Rotate the rack into place on the support bar; making sure that the rack is properly positioned so that all the clamps are resting evenly on the support bar.

STEP 15 Install the remaining two bottom clamp halves to the clamp mounting arms using the 3/4 SHCS screws from the hardware kit.


PIC.1



PIC.2



PIC.3

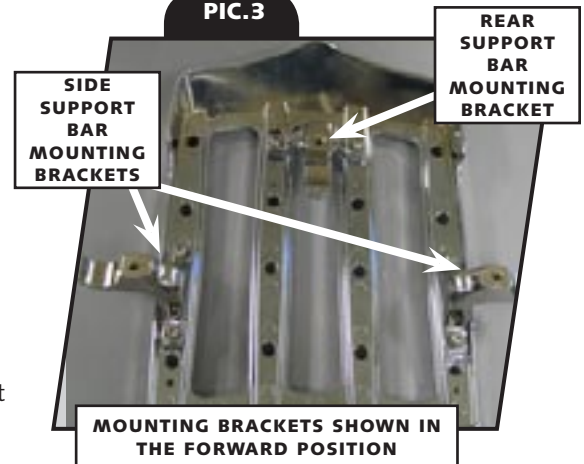

PIC.4



PAGE

2

-cont.-

LUGGAGE RACK INSTALLATION

STEP 16 Tighten all fasteners and verify that there is proper clearance.

STEP 17 Reinstall the radio antenna and saddlebags.

CAUTION! Never exceed the recommended load capacity of 10 lbs. Excess loading on the luggage rack could cause damage to your motorcycle, loss or injury. Kuryakyn is not responsible for damage, loss or injury caused by exceeding the load capacity.

Ride On!

Kuryakyn

PAGE

3

LUGGAGE RACK

INSTALLATION