



INSTRUCTIONS

-J01694

REV. 6-16-99

Kit Number 74604-99

FRONT SPEAKER TRIM

General

This kit fits 1996 and later Electra Glide model motorcycles. This kit contains two speaker trim pieces, which aren't available separately.

Installation

NOTE

Do not install this product below 60° Fahrenheit or the speaker trim will not adhere properly.

NOTE

Trim rings cannot be repositioned after initial installation so be certain the trim rings are properly aligned.

1. Gently brush or vacuum each speaker grill to remove any dust or dirt particles.
2. Cut 8 one inch long strips of narrow masking tape.
3. Without removing the adhesive backing, position the trim rings against the speaker grill.
4. Rotate trim rings into desired position and hold in place.
5. See Figure 1. Apply masking tape directly to the speaker grill above and below the trim ring cross bar and on both sides of

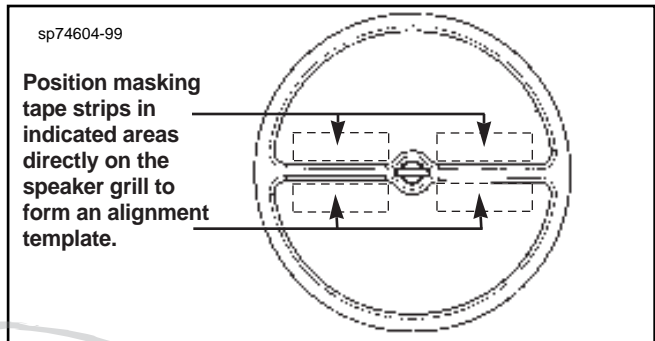


Figure 1. Speaker cover

the center Bar and Shield logo. This will serve as an installation template.

6. Remove trim ring adhesive backing.
7. Align trim ring with the masking tape template and press firmly into place.
8. Remove masking tape template.
9. Allow adhesive to cure for 24 hours before operating the motorcycle.



INSTRUCTIONS

-J01694

REV. 6-16-99

Kit Number 74604-99

FRONT SPEAKER TRIM

General

This kit fits 1996 and later Electra Glide model motorcycles. This kit contains two speaker trim pieces, which aren't available separately.

Installation

NOTE

Do not install this product below 60° Fahrenheit or the speaker trim will not adhere properly.

NOTE

Trim rings cannot be repositioned after initial installation so be certain the trim rings are properly aligned.

1. Gently brush or vacuum each speaker grill to remove any dust or dirt particles.
2. Cut 8 one inch long strips of narrow masking tape.
3. Without removing the adhesive backing, position the trim rings against the speaker grill.
4. Rotate trim rings into desired position and hold in place.
5. See Figure 1. Apply masking tape directly to the speaker grill above and below the trim ring cross bar and on both sides of

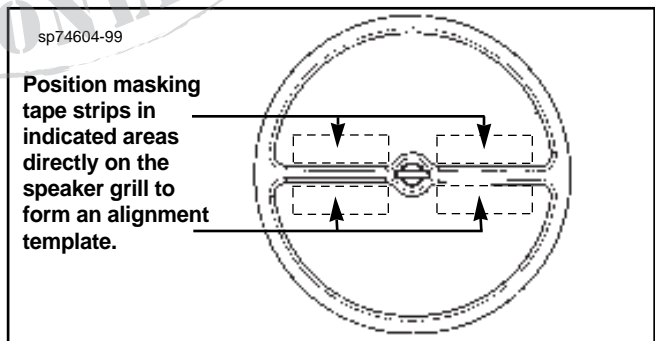


Figure 1. Speaker cover

the center Bar and Shield logo. This will serve as an installation template.

6. Remove trim ring adhesive backing.
7. Align trim ring with the masking tape template and press firmly into place.
8. Remove masking tape template.
9. Allow adhesive to cure for 24 hours before operating the motorcycle.