



# INSTRUCTIONS

-J03828

REV. 2006-10-12

## RADIO FACEPLATE TRIM

### GENERAL

#### Kit Number

77142-06

77143-07

#### Models

For model fitment information, please see the P&A Retail Catalog or the Parts and Accessories section of [www.harley-davidson.com](http://www.harley-davidson.com) (English only).

#### Kit Contents

Table 1. Kit Contents

Description (Quantity)	Part Number
Radio faceplate trim	Not Sold Separately

### INSTALLATION

#### NOTE

Mounting surface of radio faceplate trim must be above 60°F (16°C), or the trim may not stay attached.

- Using a 50:50 isopropyl alcohol/water solution, thoroughly clean the surface where the radio faceplate trim will be installed.

### CAUTION

**Do not clean with denatured alcohol, mineral spirits, or other solvent products, or damage to the radio may occur. (00411b)**

- Allow the surface to dry completely before continuing to install kit.
- Test the fit of the radio faceplate trim prior to removing adhesive backing.
- Remove the adhesive backing from the back of the radio faceplate trim.
- Open the auxiliary jack cap and feed it through the radio faceplate trim.
- See Figure 1. Position the radio faceplate trim and press firmly into place.
- Let the adhesive cure for at least 24 hours at no less than 60°F (16°C).

is00920

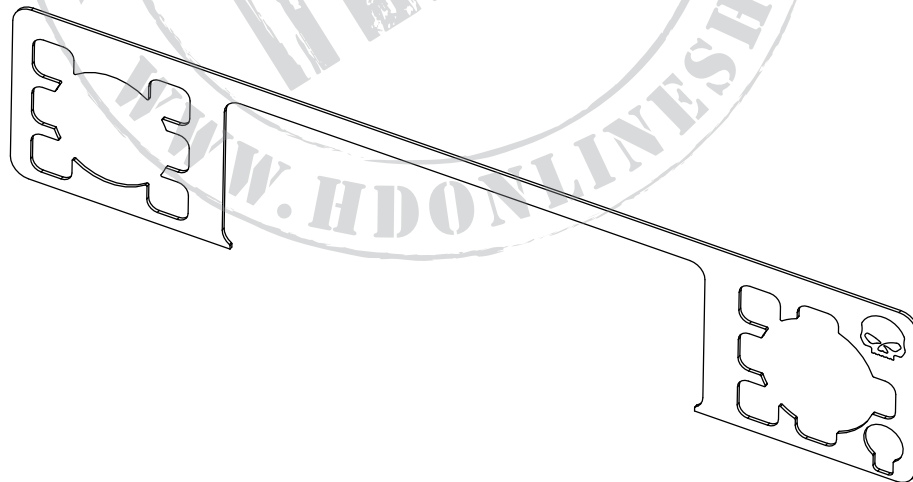


Figure 1. Radio Faceplate Trim