



INSTRUCTIONS

-J03828

REV. 2006-10-12

RADIO FACEPLATE TRIM

GENERAL

Kit Number

77142-06

77143-07

Models

For model fitment information, please see the P&A Retail Catalog or the Parts and Accessories section of www.harley-davidson.com (English only).

Kit Contents

Table 1. Kit Contents

Description (Quantity)	Part Number
Radio faceplate trim	Not Sold Separately

INSTALLATION

NOTE

Mounting surface of radio faceplate trim must be above 60°F (16°C), or the trim may not stay attached.

- Using a 50:50 isopropyl alcohol/water solution, thoroughly clean the surface where the radio faceplate trim will be installed.

CAUTION

Do not clean with denatured alcohol, mineral spirits, or other solvent products, or damage to the radio may occur. (00411b)

- Allow the surface to dry completely before continuing to install kit.
- Test the fit of the radio faceplate trim prior to removing adhesive backing.
- Remove the adhesive backing from the back of the radio faceplate trim.
- Open the auxiliary jack cap and feed it through the radio faceplate trim.
- See Figure 1. Position the radio faceplate trim and press firmly into place.
- Let the adhesive cure for at least 24 hours at no less than 60°F (16°C).

is00920

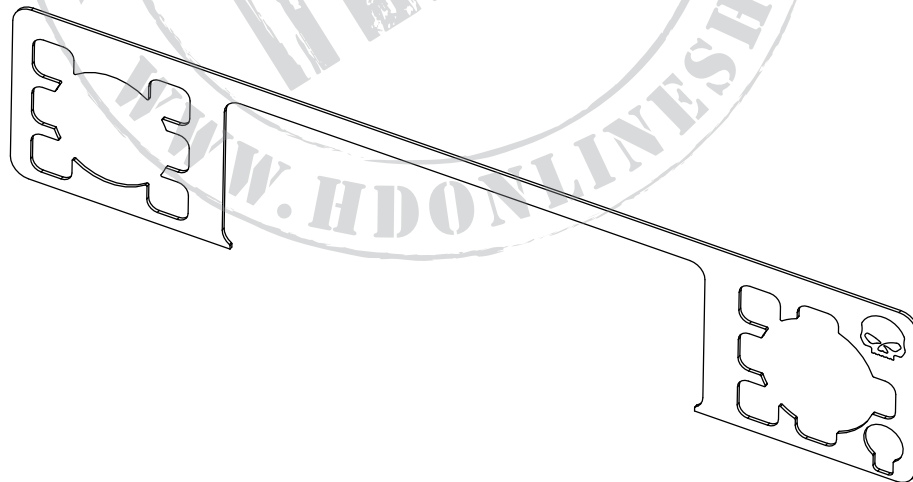


Figure 1. Radio Faceplate Trim