



INSTALLATION



OIL LINE COVER/TRANSMISSION SHROUD 8201

FITS: '02-'06 FLT MODELS (ROAD KINGS AND DRESSERS)

PARTS INCLUDED

- 1 Transmission Cover — Chrome
- 1 Hardware Kit Including:
 - 3 1/4"–20 x 1-1/2" S.H.C.S. — Chrome
 - 1 1/4"–20 x 1-7/8" Standoff Stud — Plain Steel
 - 1 1/4"–20 x 5/8" B.S.C.S. — Chrome
 - 1 1/4" I.D. Hi-Collar Split Washer — Chrome
 - 3 M6 Flat Washers — Chrome
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING! THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

TOOLS SUGGESTED


3/16" Allen wrench, 7/16" Combination wrench, 3/16" Allen socket and Inch/pound torque wrench.

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

PROCEDURE

STEP 1 Hold the cover in its approximate installed position between the engine and transmission. This will help you to determine the fasteners used in installation. See PIC.1.

-cont.-

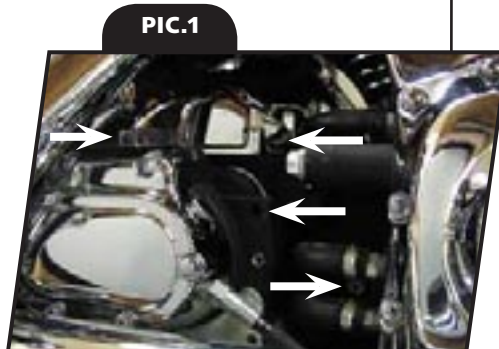

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Kuryakyn product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA All Rights reserved.



STEP 2 Remove the affected fasteners using a 3/16" Allen wrench. The fasteners involved are the two Allen bolts in the transmission top cover closest to the right side of the transmission (seated on the bike), the Allen bolt at approximately the 3-o'clock position in the transmission trap door, and remove the entire STOCK oil line cover (located where the oil pump used to be on earlier EVO models).

STEP 3 See [PIC.2](#). Install the standoff stud in the forward-most location — directly between the two oil lines. Tighten to 84-108 inch/pounds.

STEP 4 Set the cover in place and install all fasteners finger-tight. The 1/4"-20 x 5/8" B.S.C.S. with an M6 washer belongs in the lower right hand corner of the cover, two 1/4"-20 x 1-1/2" S.H.C.S. with M6 washers fasten the top edge of the cover and the remaining 1/4"-20 x 1-1/2" S.H.C.S. with the 1/4" Hi-Collar Lock Washer belongs in hole directly above the clutch cable. Once all fasteners are in place, torque them to 84-108 inch/pounds. See [PIC.3](#).

Ride On!

Küryakyn

PIC.2



PIC.3



PAGE

2

OIL LINE/TRANSMISSION SHROUD

INSTALLATION