



OIL FILLER SPOUT COVER 8264

FITS HARLEY-DAVIDSON '93-'06 DRESSER AND ROAD KING MODELS (EX. SCREAMIN' EAGLE MODELS WITH 103" ENGINE). COMPATIBLE WITH H-D ENGINE-TRANSMISSION INTERFACE COVERS 66503-00, 66503-02, AND 66096-02. ALSO COMPATIBLE WITH KÜRYAKYN TRANSMISSION SHROUD P/N 8201 AND P/N 8209.

PARTS INCLUDED

- 1 Oil spout cover
- 1 Hardware kit, including:
 - 1 1/4-28 x 7/8" button head fastener
 - 1 1/4-20 x 1 1/2" fastener
 - 2 1/4 washer
 - 1 0.270" spacer
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING! THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

TOOLS SUGGESTED

Allen wrenches.

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.


PROCEDURE

STEP 1 Remove the oil filler cap/dipstick assembly; stuff a rag in the oil filler hole to prevent any foreign objects from falling into the oil filler hole.

STEP 2 Remove the stock fastener from the starter end cover; remove the rear outermost stock fastener from the transmission top cover. See PIC.1.

-cont.-

8264-13HD-0607

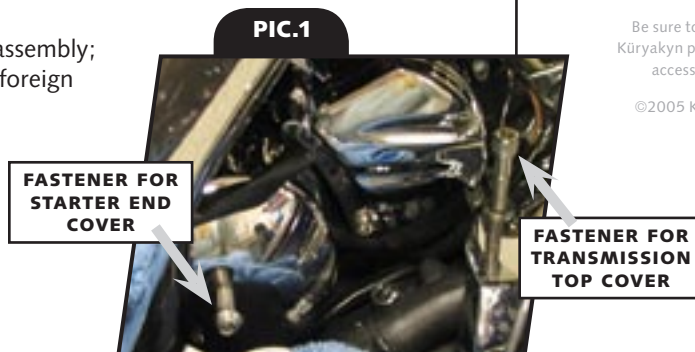

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Küryakyn warrants that any Küryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Küryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Küryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Küryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Küryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Küryakyn and a customer.
- Küryakyn products are often intended for use in specific applications. Küryakyn makes no warranty if a Küryakyn product is used in applications other than intended.
- Küryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Küryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Küryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Küryakyn. Küryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Küryakyn product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Küryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2005 Küryakyn USA All Rights reserved.




STEP 3 Install the oil spout cover into position. For motorcycles without a transmission cover (Küryakyn P/N 8201 or P/N 8209, or H-D Engine Transmission Interface Cover), install the 0.270" spacer between the oil spout cover and the transmission top cover; secure with the supplied 1/4-20 x 1-1/2" fastener and flat washer.

NOTE Motorcycles with a transmission shroud do not need the spacer.

STEP 4 Secure the oil spout cover to the starter end cover with the 1/4-28 x 7/8" button head fastener and washer. See PIC.2.

ATTENTION! It is the installers' responsibility to make sure all fasteners (including pre-assembled) are tightened before operation of motorcycle. Küryakyn will not warranty components that are lost due to improper installation. Periodic maintenance may be required.

STEP 5 Remove the rag from the oil filler hole and reinstall the oil filler cap/dipstick assembly.

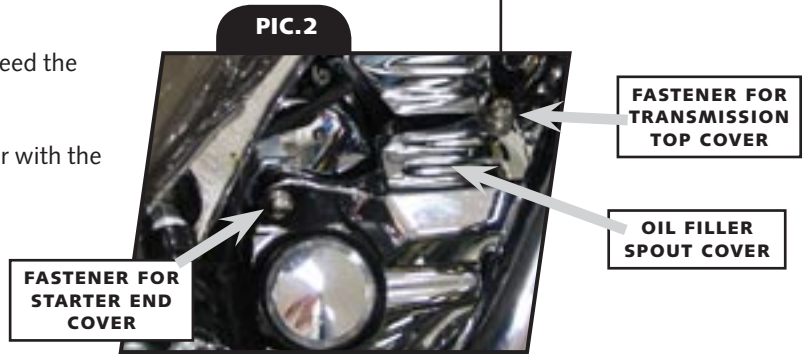

Ride On!