



INSTALLATION

RELOCATOR KIT FOR DETACHABLE TOUR-PAK 8986

FITS: '97-UP ROAD KING, FLHT, FLHX, AND FLTR MODELS EQUIPPED WITH H-D TWO-UP OR SOLO DETACHABLE TOUR-PAK RACKS (H-D P/N 53276-04 OR 53260-02) AND KING OR CHOPPED TOUR-PAKS

PARTS INCLUDED

- 1 Extender Bar
- 1 Hardware Kit including:
 - 8 1/4-20 x 1-1/8" Hex Head Cap Screw (HHCS)
 - 8 1/4" SAE Flat Washer
 - 8 1/4" Split Lock Washer
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

Tools Suggested

Set of combination wrenches, ft-lb torque wrench, socket set and ratchet.

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

PROCEDURE

NOTE It may be necessary to use an antenna relocation kit such as Kuryakyn P/N 853 or H-D P/N 76208-07.

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.

STEP 2 Remove the mat from the bottom of the Tour-Pak. Disconnect any wiring from the Tour-Pak.

STEP 3 Remove the five nuts, bolts and washers that secure the Pak and the bar to the motorcycle. The spacers, one bolt, one nut and two washers will be reused; the remaining hardware can be discarded.

-cont.-

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

· Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).

· The product must be properly installed, maintained and operated under normal conditions.

· Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.

· Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.

· Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.

· Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.

· Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Kuryakyn product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA All Rights reserved.



ATTENTION! Assistance is recommended to secure the Tour-Pak after all of the fasteners have been removed to prevent damage.

STEP 4 Place the spacers and extender bar on the rack as shown in [PIC.1](#).

STEP 5 Secure the bar using four 1/4-20 x 1-1/8" HHCS screws, 1/4" flat and 1/4" lock washers from the hardware kit. Place the lock washer, then the flat washer over the end of the screw and insert the screws from the bottom of the rack into the extender bar. Torque the bolts to 6-9ft. lbs.

STEP 6 Place the Tour-Pak on the on the extender bar and align the holes in the bottom of the Pak with the holes in the bar.

STEP 7 Secure the Pak to the bar using four 1/4-20 x 1-1/8" HHCS screws, 1/4" flat and 1/4" lock washers from the hardware kit. These screws belong in the forward holes ([PIC.2](#)) Place the lock washer, and then the flat washer over the end of the screw and insert the screws through the Pak into the extender bar. Torque the bolts to 6-9ft. lbs.

STEP 8 Refer to [PIC.2](#) place the bolt and washer that were removed in STEP 3 in the rear hole of the Pak.


STEP 9 Place the spacer and washer on the bottom side of the bar over the protruding end of the bolt and secure with the nut that was removed in STEP 3. (See [PIC.3](#).)

STEP 10 Reconnect any wiring that was disconnected in STEP 2.


CAUTION! Never exceed the manufacturer's recommended load capacity. Excess loading on the luggage rack could cause damage to your motorcycle, loss or injury. Küryakyn is not responsible for damage, loss or injury caused by exceeding the manufacturer's load capacity.

ATTENTION! It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Küryakyn will not warranty components lost due to improper installation. Periodic maintenance may be required.


Ride On!

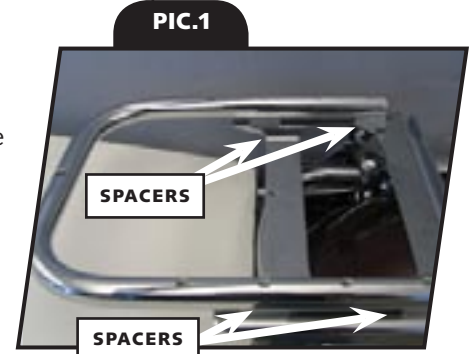

PIC.1

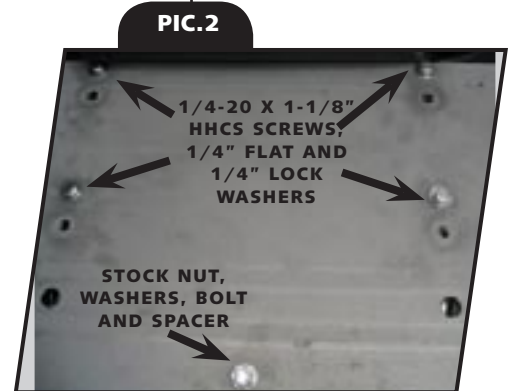

PIC.2

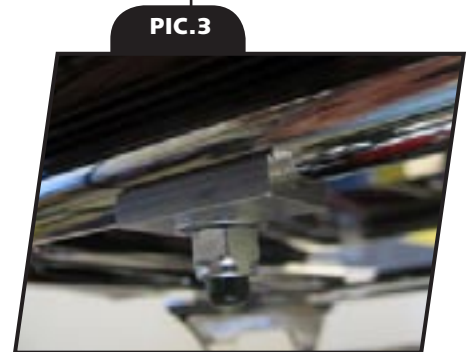

PIC.3