



# INSTRUCTIONS

-J04741

REV. 2008-03-03

## V-LOGO REAR FENDER TRIM RAIL

### GENERAL

#### Kit Number

91100-09

#### Models

For model fitment information, please see the P&A Retail Catalog or the Parts and Accessories section of [www.harley-davidson.com](http://www.harley-davidson.com) (English only).

### WARNING

The rider's safety depends upon the correct installation of this kit. Use the appropriate service manual procedures. If the procedure is not within your capabilities or you do not have the correct tools, have a Harley-Davidson dealer perform the installation. Improper installation of this kit could result in death or serious injury. (00333a)

#### Kit Contents

See Figure 1 and Table 1.

### INSTALLATION

#### NOTE

All models for which this kit is designed are equipped with an original equipment (stock) fender rail or bumper. Remove the stock bumper and install the kit rail using following the procedures.

1. See Figure 1 and Table 1. Install V-logo (4) to trim rail (1) with hex washer screws (3) and lock washers (2).
2. Reach under rear edge of fender and remove locknut (A) and washer (B). Retain locknut and washer and use to mount new trim rail.
3. Loosen and remove the two screws (C) and locknuts (D) which attach fender rail to saddlebag support bracket. Retain screws (C) and locknuts (D) and use to mount new trim rail.
4. Place new trim rail in position and install washer (B), locknut (A), screws (C) and locknuts (D).
5. Tighten locknut (A) to 45-85 **in-lbs** (5.0-9.6 Nm) and locknuts (D) to 15-20 **ft-lbs** (20.3-27.1 Nm).

### SERVICE PARTS

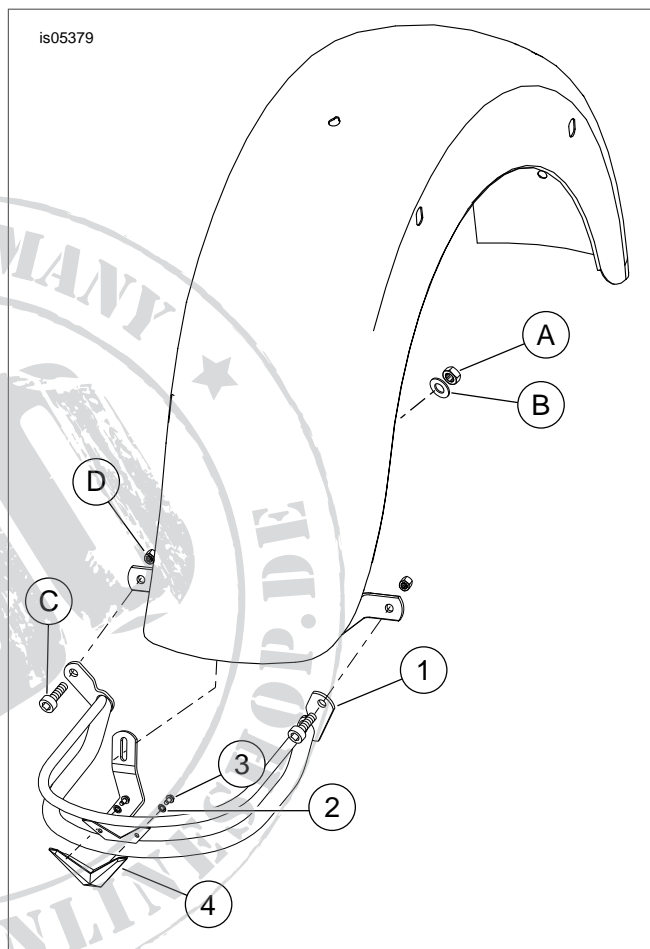


Figure 1. Service Parts: V-Logo Rear Fender Rail

Table 1. Service Parts

Item	Description (Quantity)	Part Number
1	Trim rail, rear fender	Not Sold Separately
2	Lock washer (2)	7115
3	Hex washer screw (2)	7611
4	V-logo	91112-94
<b>Items mentioned in text, but not included in kit.</b>		
A	Locknut (2)	
B	Washer (2)	
C	Screw (2)	
D	Locknut (2)	