



INSTRUCTIONS

-J03074

REV. 2007-11-21

STAINLESS STEEL SWITCH HOUSING HARDWARE KIT

GENERAL

Kit Number

91124-03A

Models

For model fitment information, please see the P&A Retail Catalog or the Parts and Accessories section of www.harley-davidson.com (English only).

Additional Parts Required

⚠ WARNING

The rider's safety depends upon the correct installation of this kit. Use the appropriate service manual procedures. If the procedure is not within your capabilities or you do not have the correct tools, have a Harley-Davidson dealer perform the installation. Improper installation of this kit could result in death or serious injury. (00333a)

NOTE

This instruction sheet references Service Manual information. A Service Manual for your model motorcycle is required for this installation and is available from a Harley-Davidson Dealer.

Kit Contents

See Figure 1 and Table 1.

INSTALLATION

⚠ WARNING

To prevent accidental vehicle start-up, which could cause death or serious injury, disconnect negative (-) battery cable before proceeding. (00048a)

⚠ WARNING

Disconnect negative (-) battery cable first. If positive (+) cable should contact ground with negative (-) cable connected, the resulting sparks can cause a battery explosion, which could result in death or serious injury. (00049a)

1. Disconnect the negative (-) battery cable following the instructions in the appropriate Service Manual.
2. Follow the procedure in the appropriate Service Manual to remove the existing screws from handlebar switch housings, clutch lever assembly and front brake lever and throttle control.
3. See Figure 1. For the upper and lower clutch lever and front brake lever housing clamps, use screws (1) with washers (3). Tighten per the appropriate Service Manual.
4. For the switch cover housings, use screws (2). Tighten per the appropriate Service Manual.

SERVICE PARTS

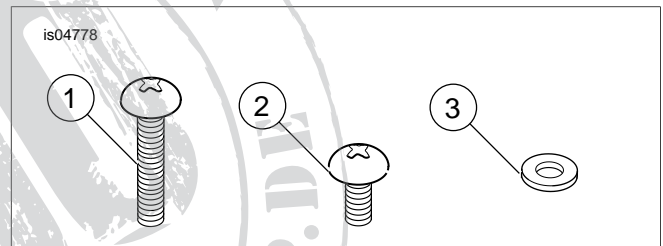


Figure 1. Service Parts: Switch Housing Hardware Kit

Table 1. Service Parts

Item	Description (Quantity)	Part Number
1	Screw, button head TORX®, 1/4-20 x 1-1/8 inch (4)	4456
2	Screw, button head TORX, 10-24 x 1/2 inch (4)	4457
3	Washer, 1/4 inch (4)	6436