



# INSTRUCTIONS

-J02725

REV. 03-17-2004

Kit Numbers 91360-03

## BILLET CLUTCH CABLE CLIP KIT

### General

This kit is designed for installation on 2000 and later Softail model motorcycles.

### Kit Contents

ITEM	DESCRIPTION	PART NO.
1	Clamp, clutch	38718-04
2	Base plate, clutch cable clip	Not sold separately
3	Capscrew, hex socket button head	94378-92T

#### NOTE

A Service Manual for your model motorcycle is available from any Harley-Davidson dealer.

### Installation

#### NOTE

The clutch cable clamp base plate, (item # 2) should only be installed when the vehicle is equipped with an engine guard as in Figure 2.

### Procedure for Models without Engine Guard installed:

1. The items from the above kit replace the original equipment clutch cable clamp and capscrew located on the left frame downtube.
2. Remove and discard the existing self tapping capscrew and clutch cable clamp that is clamping the clutch cable to the left frame downtube.
3. See Figure 1. Apply one drop of Loctite®242 (blue) to the new capscrew (3) threads. Install the chrome clutch hose clip (1) and capscrew (3), securing the clutch cable to the frame downtube horizontal mounting bracket.
4. Tighten screw to 12-24 in-lbs (2.3-2.5N-m).

### Procedure for Models with Engine Guard installed:

#### NOTE

"If installing Clutch Cable Adjuster Dust Cover Part Number 64108-03, with the base plate clip, follow this procedure".

1. See Figure 2. Apply one drop of Loctite® 242 (blue) to the new capscrew (3) threads. Install the chrome clutch hose clip (1), clutch cable clamp base plate (2) and capscrew (3), securing the clutch cable, to the frame downtube horizontal mounting bracket rotating the clamp 180 degrees to allow for clearance form the engine guard.
2. Tighten screw to 12-24 in-lbs (2.3-2.5N-m).

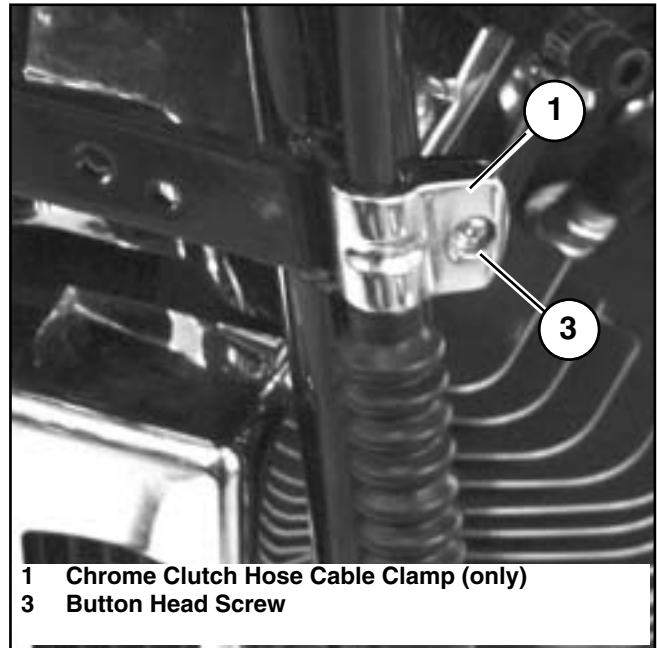


Figure 1. Installation of Clutch Cable Clip

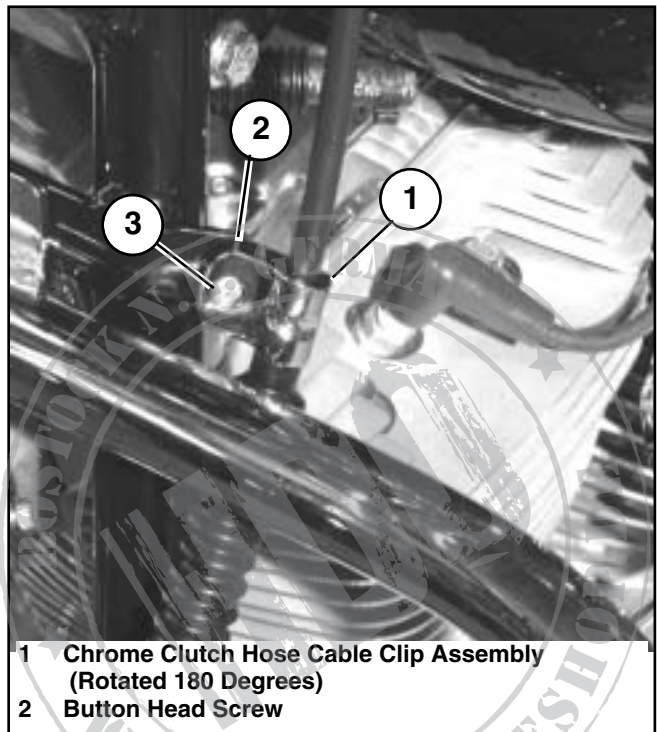


Figure 2. Installation of Clutch Cable Clip Assembly with Engine Guard