



SILHOUETTE CUSTOM TIE-DOWN BRACKETS 929

FITS: '83-UP FLHT, FLHTC, FLHTCU, FLHR, FLHRC, FLHRS, COMPATIBLE WITH DETACHABLE WINDSHIELD

PARTS INCLUDED

- 2 Silhouette Brackets
- 1 Hardware Kit Including:
 - 4 5/16-18 x 1 " Button Head Cap Screw (BSCS)
 - 4 5/16-24 x 1 " Button Head Cap Screw (BSCS)
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING! THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

TOOLS SUGGESTED


Set of hex wrenches, Torx wrenches, combination wrenches, foot pounds (ft. lbs.) torque wrench.

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

PROCEDURE

STEP 1 Park the motorcycle on a hard, level surface; turn off the ignition and allow the engine to cool.

STEP 2 Remove the two fasteners on the forks (only remove one side at a time,) which will either be two acorn nuts (see [PIC.1](#)), or two Torx head screws (see [PIC.2](#) next page). Remove the acorn nuts and save to be reinstalled, or remove the Torx screws which will not be reused but will need to be referenced to select the proper screws from the hardware kit.

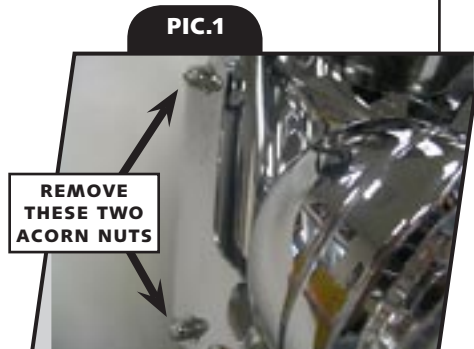

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Kuryakyn product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA All Rights reserved.



NOTE

It may not always be possible to reuse the acorn nut, as the stud may not be long enough to thread the acorn nut once the bracket has been installed. If this is the case, it will be necessary to remove the OEM stud and use the screws from the hardware kit to secure the bracket.

STEP 3 Place the tie-down brackets on the fork with the silhouette head end up placing the holes over on the studs, reuse the acorn nuts removed in STEP 1 to secure the bracket to the forks. On models that had the Torx head screws; there are two different sets of screws included in the hardware kit (a set of fine thread and a set of course thread.) Once you have determined which set of screws will need to be used, place the bracket over the holes and secure with the screws.

STEP 4 Torque the nuts or screws from the previous step to 16-18 ft. lbs.

STEP 5 Repeat STEP 2 through STEP 4 to install the bracket on the other side of the forks.

Ride On!

Kuryakyn**PIC.2****PAGE****2****TIE-DOWN BRACKETS****INSTALLATION**