



INSTRUCTIONS

-J01142

REV. 2006-10-24

FLAG SISSYBAR MOUNT KITS

GENERAL

Kit Number

51512-02, 51511-02, 52764-90, 52744-94, 52513-94

Models

For model fitment information, please see the P&A Retail Catalog or the Parts and Accessories section of www.harley-davidson.com (English only).


NOTE

Flags are not intended for highway use. The construction of these flags will not hold up to the wind speeds seen at highway speeds. These flags are designed for parade use only.

Kit Contents

Table 1. Kit Contents

Description (Quantity)	Part Number
Tie wrap (4)	10006
Flag mast	Not Sold Separately
Flag	Not Sold Separately

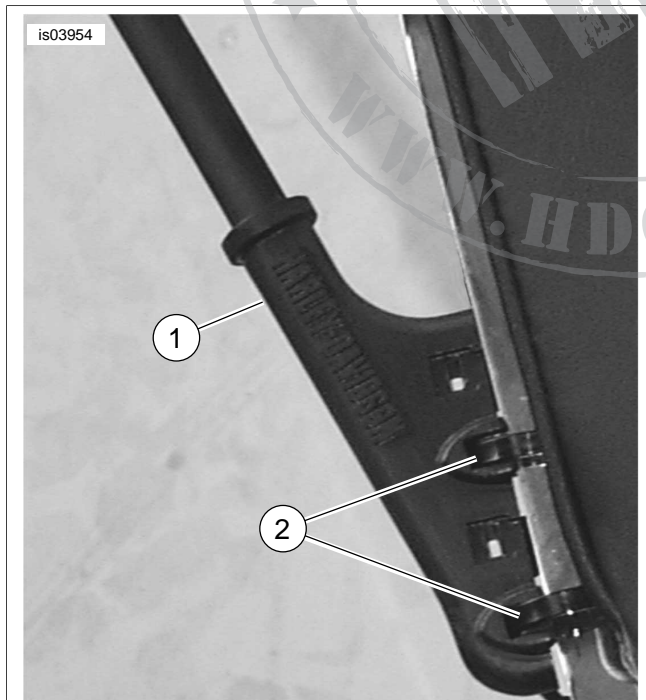

- 1. Flag mast
- 2. Tie wraps


Figure 1. Exterior View of Installed Flag Mast

INSTALLATION

NOTE

On some sissybars, removal of the pad will be necessary before installing the flag mast.

1. See Figure 1. Install flag mast (1) with two tie wraps (2) as shown:
 - Remove the sissy bar pad, if necessary.
 - Hold the flag mast in desired position against sissy bar.
 - See Figure 2. Insert 2 tie wraps as shown (with the ends of the tie wraps against the interior side of the flag mast). Pull so that cable straps are as snug as possible and flag mast is securely fastened to the sissy bar. Trim cable tie (1) ends.

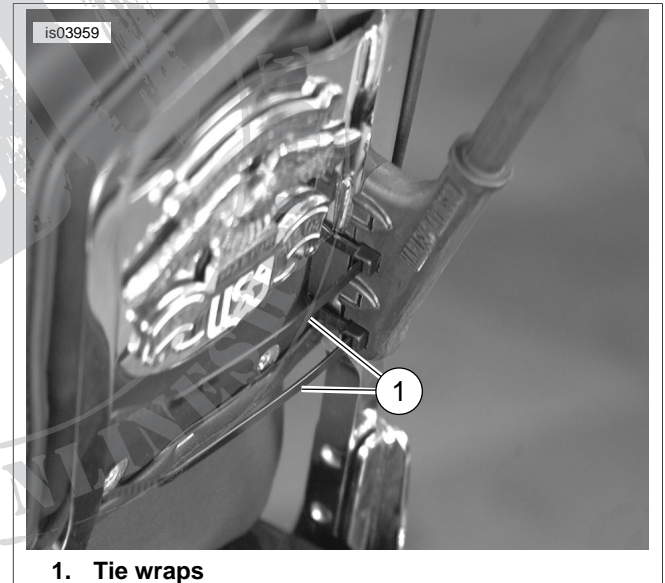

- 1. Tie wraps

Figure 2. Interior View of Installed Flag Mast

NOTE

Only 2 tie wraps are required to safely secure the flag mast. The tie wraps may be installed in any two of the four holes. It is suggested that the tie wraps be placed in every other hole.