



INSTRUCTIONS

-J05750

2013-04-10

UPPER FORK SLIDER COVERS

GENERAL

Kit Number

45600022, 45600023

Models

For model fitment information, see the P&A Retail Catalog or the Parts and Accessories section of www.harley-davidson.com (English only).

Additional Parts Required

Loctite[®] 243 Threadlocker and Sealant - Blue

▲ WARNING

The rider's safety depends upon the correct installation of this kit. Use the appropriate service manual procedures. If the procedure is not within your capabilities or you do not have the correct tools, have a Harley-Davidson dealer perform the installation. Improper installation of this kit could result in death or serious injury. (00333a)

NOTE

This instruction sheet references service manual information. A service manual for your model motorcycle is required for this installation and is available from a Harley-Davidson Dealer.

Kit Contents

See Figure 1 and Table 1.

REMOVAL

1. See the service manual and follow the front fork removal procedures.
2. Remove the two OE fork cover screws. Save screws for installation.
3. Slide the OE fork cover off the front forks.

INSTALLATION

See Figure 1. The Fork Slider Covers included in this kit install in the same manner as the original equipment parts. Refer to the service manual for proper installation procedures.

1. Apply Loctite 243 to threads of screws.
2. Install the **new** fork slider cover and two screws on the front fork. Tighten to 2.7–5.4 N·m (24–48 in-lbs).
3. Follow the installation instructions to install and adjust the front forks.

SERVICE PARTS

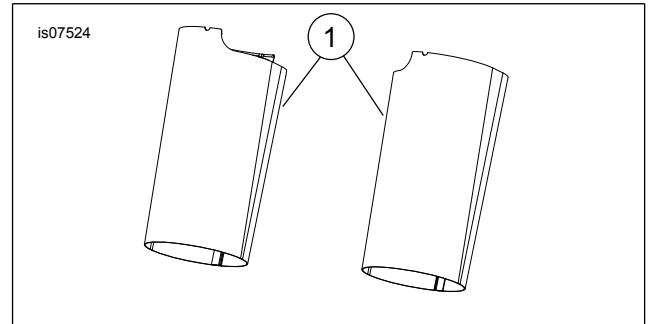


Figure 1. Service Parts: Fork Slider Covers

Table 1. Service Parts

Item	Description (Quantity)	Part Number
1	Fork slider covers, chrome (2)	Not Sold Separately
	Fork slider covers, black (2)	Not Sold Separately

