



INSTRUCTIONS

-J05278

REV. 2010-11-05

FXS SOFTAIL SEAT KITS

GENERAL

Kit Number

52000011, 52000012

Models

For model fitment information, see the P&A Retail Catalog or the Parts and Accessories section of www.harley-davidson.com (English only).

Kit Contents

See Figure 2 and Table 1.

INSTALLATION

NOTE

When performing the following installation procedures, avoid scratching painted surfaces (fender, tank, etc.) with tools or metal seat tabs.

1. See the owner's manual and remove the seat. Save seat mounting screw.
2. See Figure 2. Remove and discard existing grab strap and save fastening hardware from the motorcycle.
3. See Figure 2. Install the grab strap (3) from kit with the hardware saved in step 2. Install the grab strap using the holes shown in Figure 1.

WARNING

After installing seat, pull upward on seat to be sure it is locked in position. While riding, a loose seat can shift causing loss of control, which could result in death or serious injury. (00070b)

4. See Figure 2. Slide the back of the seat through grab strap and hook front tab of seat (1) into frame. Secure seat bracket to fender with screw from step 1.

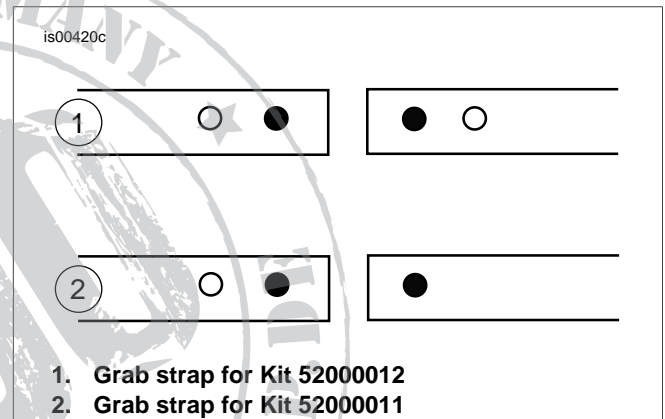


Figure 1. Grab Strap Installment Information

SERVICE PARTS

is00422a

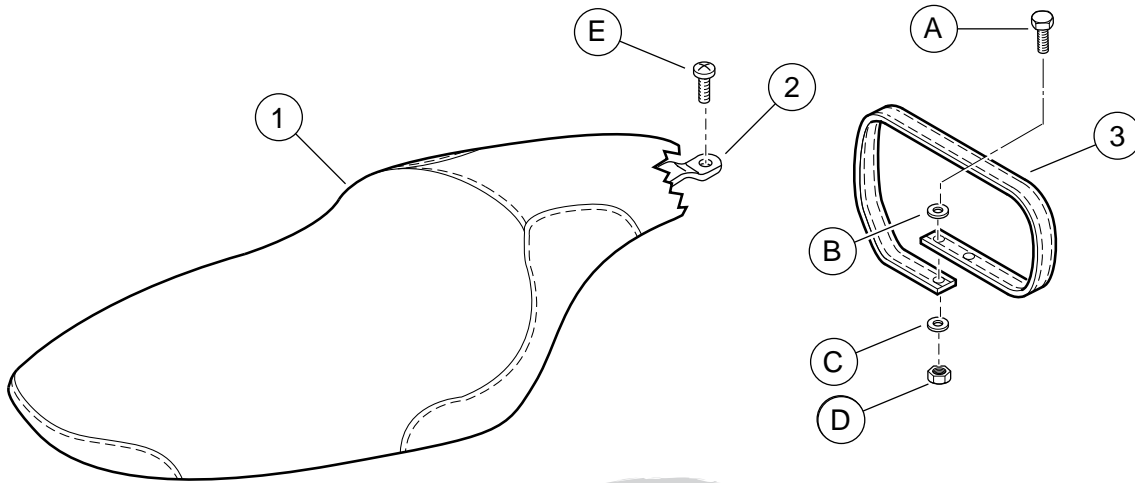


Figure 2. Service Parts: Softail Seats

Table 1. Service Parts Table

Item	Description (Quantity)	Part Number
1	Seat (Generic style shown)	Not Sold Separately
2	Bracket	51652-97A
3	Grab strap in Kit 52000012	51195-08
	Grab strap in Kit 52000011	51188-00
Items mentioned in text, but not included in kit:		
A	Screw	
B	Washer	
C	Retention washer	
D	Retention nut	
E	Screw, rear seat bracket	
	Seat nut kit (includes items C and D)	59768-97