



INSTRUCTIONS

-J04830

2012-05-20

TOURING MODEL P&A EXHAUST SHIELDS

GENERAL

Kit Number

64981-09, 66906-10, 65400064, 65400117

Models

For model fitment information, see the P&A Retail Catalog or the Parts and Accessories section of www.harley-davidson.com (English only).

Kit Contents

See Figure 2 and Table 1.

There are no service parts available with this kit.

▲ WARNING

The rider's safety depends upon the correct installation of this kit. If the procedure is not within your capabilities or you do not have the correct tools, have a Harley-Davidson dealer perform the installation. Improper installation of this kit could result in death or serious injury. (00308a)

NOTE

A service manual for the year and model motorcycle is available from a Harley-Davidson dealer.

INSTALLATION

Remove Original Equipment (OE) Exhaust Shields

▲ WARNING

Avoid contact with exhaust system and wear protective clothing that completely covers legs while riding. Exhaust pipes and mufflers get very hot when engine is running and remain too hot to touch, even after engine is turned off. Failure to wear protective clothing could result in burns or other serious injury. (00009a)

1. Allow the motorcycle to cool.
2. Note the position of the OE clamp screws securing the exhaust shields to the exhaust pipes.

NOTE

The clamp screws are positioned on either side of the exhaust pipe for clearance.

3. See Figure 1. Open the band clamps (1) and spread the bands to remove front and rear exhaust shields (2) from the exhausts.

4. Remove the clamps from the exhaust shields and save for installation.


Install Black Exhaust Shields

1. Install the OE clamps to the new exhaust shields.
2. See Figure 2. Spread the band around the exhaust pipes and push the end of the bands to engage the clamp screws. Tighten to hold the exhaust shields in place.
3. Adjust the shields and band clamps to access clamp screws and to avoid contact with other components.

NOTICE

Wipe all fingerprints off of exhaust system components after installation and before starting engine. Oil from hands can leave permanent marks on exhaust system finish. (00346a)

4. Tighten the clamp screws.

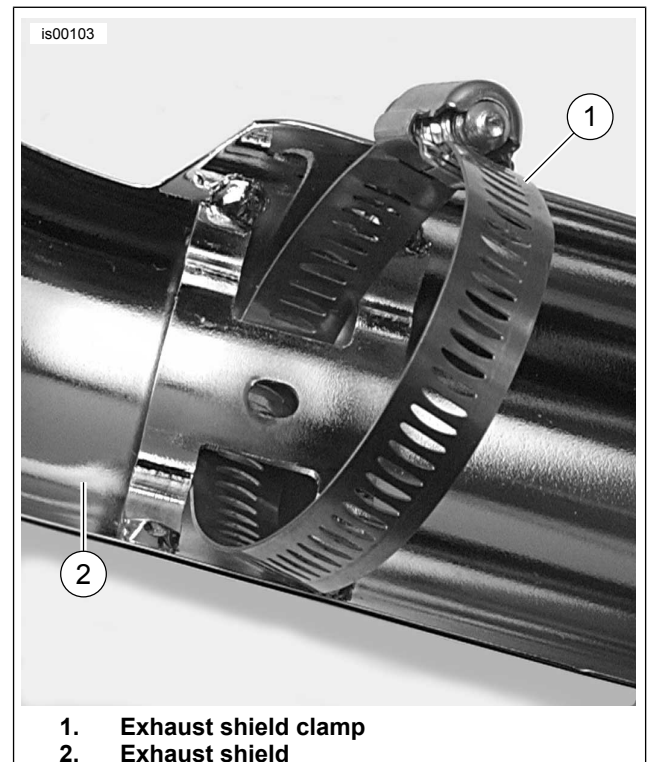

1. Exhaust shield clamp
2. Exhaust shield

Figure 1. Exhaust Shield Clamp and Exhaust Shield



SERVICE PARTS

is05936

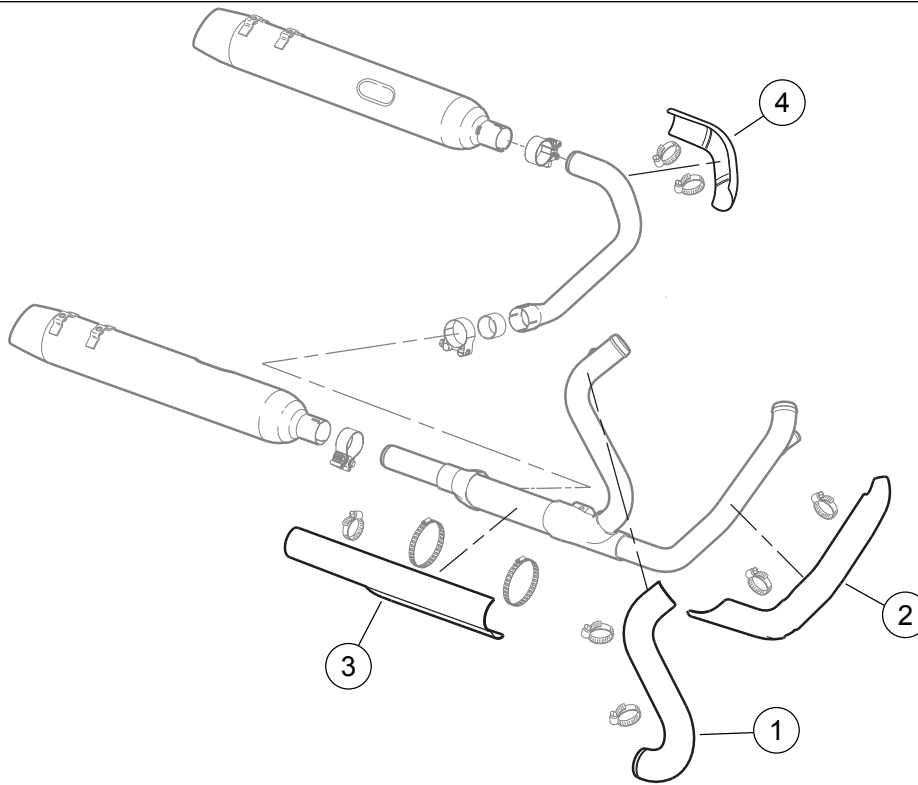


Figure 2. Service Parts: Touring Model P&A Exhaust Shields

Table 1. Service Parts Table

Kit	Item	Description (Quantity)	Part Number
Kit 64981-09	1	Exhaust shield, right, upper rear	Not Sold Separately
	2	Exhaust shield, right, upper front	Not Sold Separately
	3	Exhaust shield, right, lower rear	Not Sold Separately
	4	Exhaust shield, left, rear (not included in all kits)	Not Sold Separately
Kit 66906-10	1	Exhaust shield, right, upper rear (black)	Not Sold Separately
	2	Exhaust shield, right, upper front (black)	Not Sold Separately
	3	Exhaust shield, right lower rear (black)	Not Sold Separately