

INSTALLATION INSTRUCTIONS

MESH L.E.D. FUEL AND BATTERY GAUGE, CHROME

6550

THANK YOU FOR CHOOSING KURYAKYN!

Protect yourself and others from possible injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

WARNING THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN MINOR OR MODERATE POTENTIAL INJURY.

NOTICE THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN MAY NEGATIVELY AFFECT PRODUCT PERFORMANCE AND FUNCTIONALITY OR DAMAGE THE PRODUCT ITSELF OR THE PRODUCT TO WHICH IT IS BEING ATTACHED.

ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- | | | | |
|---|------------------------------------|---|----------------------------------|
| 1 | Mesh L.E.D. Fuel and Battery Gauge | 1 | Hardware/Wiring Kit, containing: |
| | | 1 | '08-Up Adapter Disc (Red) |
| | | 1 | '07-Earlier Adapter Disc (Green) |
| | | 3 | #6-32 Hex Nuts |
| | | 3 | #6 External Tooth Lock Washers |
| | | 1 | 4-Pin Connector (Black) |
| | | 1 | 2-Pin Connector (Black) |

YOU WILL ALSO NEED:

Needle nose pliers; socket set and ratchet; set of combination wrenches, year- and model-specific service manual, electrical tape, bright flashlight

NOTICE THESE INSTALLATION INSTRUCTIONS CONTAIN IMPORTANT INFORMATION. ENSURE THE END USER RECEIVES THIS COPY AND IS AWARE OF ITS IMPORTANCE FOR FUTURE USE.

WARNING THE END USER'S SAFETY DEPENDS UPON PROPER IN-STALLATION OF THIS PRODUCT. IF A STEP IN THESE INSTRUCTIONS IS NOT WITHIN YOUR CAPABILITIES OR YOU DO NOT HAVE THE CORRECT TOOLS, HAVE YOUR DEALER PERFORM THE PROCEDURE. IMPROPER INSTALLATION OF THIS PRODUCT COULD RESULT IN DEATH OR SERIOUS INJURY.

ACCIDENTAL VEHICLE START-UP COULD CAUSE DEATH OR SERIOUS INJURY, REMOVE THE MAIN FUSE BEFORE PROCEEDING.

NOTICE AVOID DAMAGE TO THE MOTORCYCLE. PROTECT PAINTED SURFACES WITH A SOFT CLOTH OR BLANKET.

WARNING INSTALLATION MAY REQUIRE CONTACT WITH THE ENGINE AND EXHAUST SYSTEM. ENSURE THAT THE ENGINE AND EXHAUST SYSTEM HAVE FULLY COOLED BEFORE BEGINNING TO PREVENT INJURY.

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let motorcycle cool.

Note: The Mesh Gauge, has been factory calibrated to blink red with one gallon of fuel remaining in the tank.

If you wish to create a "reserve", follow the Calibration Procedure on PAGE 5. However, the Gauge DOES NOT require calibration to function correctly!

STEP 2 Disconnect the negative battery cable.

KURYAKYN.COM

INSTALLATION INSTRUCTIONS

MESH L.E.D. FUEL AND BATTERY GAUGE, CHROME

6550

-CONTINUED-

STEP 3 The existing fuel gauge wires run through a tube inside the fuel tank. The wires exit the underside of the fuel tank on the clutch-side (left). The wires are held in place with a retaining clip near a connect-or. Gently open the clip and disconnect the connector - this will provide more free play in the wires easing removal of the gauge.

Carefully pull upward on the existing fuel gauge while rocking it side to side to remove it from the tank. DO NOT TWIST the gauge!

'88-'00 MODELS SKIP TO STEP 24 ON PAGE 4

'01-'07 AND '08-LATER MODELS MOVE ON TO STEP 4

STEP 4 The fuel-gauge-side of the connector must be removed in one of two ways to allow the wires to be pulled through the wire passage in the tank:

1. Cut off the gauge-side connector. DO NOT cut off the main harness-side connector!

OR

2. Remove the terminal pins from the connector. (Consult the year- and model-specific service manual in the Electrical section - "Amp Multi-lock Electrical Connect-ors".)

STEP 5 Remove the existing gauge; set it aside, it will not be reused.

'01-'07 MODELS SKIP TO STEP 11

'08-LATER MODELS MOVE ON TO STEP 6

'08 AND LATER MODELS:

STEP 6 Refer to PIC 1 and 2. Locate the included Red Adapter Disc labeled, "Terminal Wiring Adapter '08-up". Locate the included Mesh Gauge; remove the warning label, outer nut, and washer from the "S" terminal stud.

STEP 7 Refer to PIC 2. Remove the stud protectors from the remaining terminal studs.

STEP 8 Refer to PIC 3. Position the Red Adapter over the four studs with the existing nuts. Secure the Adapter with the four (4) included #6-32 Nuts and Lock Washers.

STEP 9 Route all three of the wires from the Red Adapter through the tank passage in the same manner as the previous wires.

STEP 10 Carefully tuck the remaining length of the three wires into the fuel gauge cavity so they will not interfere with the installation of the Gauge. Align the Gauge with the key slots in the tank and carefully press it all the way into the cavity until it is flush with the top surface. SKIP TO STEP 20



PIC 1



PIC 2



PIC 3

INSTALLATION INSTRUCTIONS

MESH L.E.D. FUEL AND BATTERY GAUGE, CHROME

6550

-CONTINUED-

'01-'07 MODELS:

- STEP 11** Determine which configuration is found on the existing gauge:
- "3 wire" = three EQUAL length wires; yellow, orange, and black.
- OR
- "4-wire" = two LONG wires, orange and black; and two SHORT wires, yellow and black.
- STEP 12** Refer to PIC 4. Locate the Green Adapter labeled, "Bullet Wiring Adapter '07-earlier".
- STEP 13** Refer to PIC 2. Remove the warning label, outer nut, and washer from the "S" terminal stud.
- STEP 14** Refer to PIC 2. Remove the stud protectors from the remaining terminal studs.
- STEP 15** Position the Green Adapter over the four studs with the existing nuts. Secure the Adapter with the four (4) included #6-32 Nuts and Lock Washers.
- "4-WIRE" SKIP TO STEP 18; "3-WIRE" MOVE ON TO STEP 16**

"3-WIRE" PROCEDURE:

- STEP 16** Route all three of the long wires from the Mesh Gauge through the tank passage in the same manner as the previous wires.
- STEP 17** Use electrical tape to secure the short yellow and black wires together; tuck them into the gauge cavity in the tank. The wires will not be used.

Carefully tuck the remaining length of wires into the gauge cavity so they will not interfere with the installation of the Gauge. Align the Gauge with the key slots in the tank and carefully press it all the way into the cavity until it is flush with the top surface. **SKIP TO STEP 20.**


"4-WIRE" PROCEDURE:

- STEP 18** Refer to PIC 5. Cut the long yellow wire off at the heat shrink. Use electrical tape to seal the end.
- Connect the short black and yellow wires to the existing ones in the cavity.
- Route the long orange and black wires through the tank passage.
- STEP 19** Refer to PICs 6 and 7. Insert the orange and black wire terminals as shown.
- The terminals should lightly "click" into place in the connector. If the terminal does not "click" into place, remove the terminal, rotate it 180 degrees and try again.
- Do not force the terminals into the connector—they should "click" into position easily.
- If force is needed, you are inserting the terminals the wrong way.

SKIP TO STEP 21



PIC 4

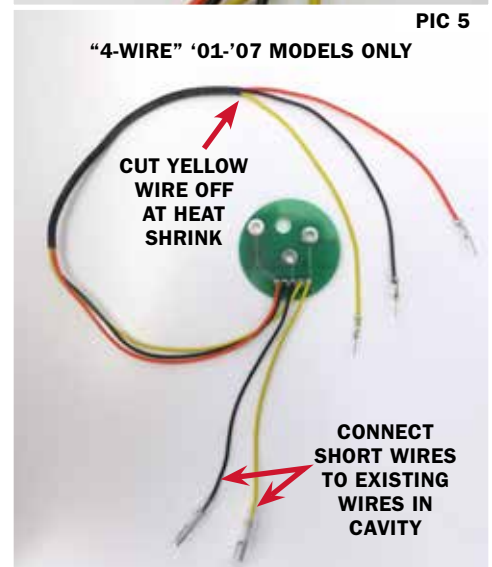


PIC 5

"4-WIRE" '01-'07 MODELS ONLY



PIC 6

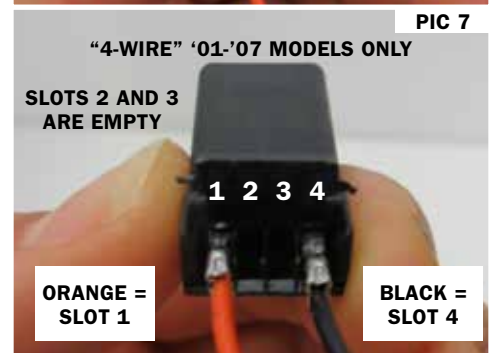

PIC 7

"4-WIRE" '01-'07 MODELS ONLY

SLOTS 2 AND 3 ARE EMPTY

ORANGE = SLOT 1

BLACK = SLOT 4

INSTALLATION INSTRUCTIONS

MESH L.E.D. FUEL AND BATTERY GAUGE, CHROME

6550

-CONTINUED-

FOLLOW THE GUIDELINES BELOW TO PREPARE THE INCLUDED CONNECTOR.

DETERMINE THE CORRECT PROCEDURE BEFORE ASSEMBLING THE CONNECTOR.

- STEP 20** Refer to PICs 8 through 10. Insert the yellow, orange, and black wire terminals as shown. The terminals should lightly “click” into place in the connector. If the terminal does not “click” into place, remove the terminal, rotate it 180 degrees and try again. Do not force the terminals into the body—they should “click” into position easily. If force is needed, you are inserting the terminals the wrong way.
- STEP 21** Fold the clasp over to secure the terminals. (For additional information on assembling this connector, consult the year- and model-specific service manual Electrical section — “Amp Multi-lock Electrical Connectors”.)
- STEP 22** Connect the Gauge connector to the main harness connector; secure the wiring in the retaining clip on the underside of the tank.
- STEP 23** Reconnect the negative battery cable; turn IGN ON and test the Mesh Gauge for function.

INSTALLATION IS COMPLETE

‘88-‘00 MODELS:


- STEP 24** On the existing gauge, remove the nut securing the pink OR yellow/white (FUEL LEVEL) wire to the terminal marked “S”.
- STEP 25** Locate the Mesh Gauge. READ and remove the warning tag. Secure ONLY the existing pink or yellow/white (FUEL LEVEL) wire to the Mesh Gauge “S” terminal with one of the included #6-32 Nuts and a Lock Washer.

WARNING

CONNECTING ANY OTHER WIRE TO THE “S” TERMINAL MAY CAUSE A FUEL TANK EXPLOSION RESULTING IN SERIOUS INJURY OR DEATH.

- STEP 26** Remove the stud protectors from the “G” and “I” terminals on the Mesh Gauge. Remove the nuts from the “G” and “I” terminals on the existing gauge; remove the existing wires.
- Note: Removing the bulb holder can simplify removal of the “G” terminal wires.*
- STEP 27** Position the two black (GROUND) wires over the “G” terminal of the Mesh Gauge; secure with one of the included #6-32 Nuts and a Lock Washer.
- STEP 28** Position the orange (POWER) wire over the “I” terminal; secure it with one of the included #6-32 Nuts and a Lock Washer.
- STEP 29** Make sure all nuts are tightened securely.
- STEP 30** Carefully tuck the wires into the gauge cavity so they will not interfere with the installation of the Gauge. Reconnect the connector from STEP 3.
- STEP 31** Align the Gauge with the key slots in the tank and carefully press it all the way into the cavity until it is flush with the top surface.
- STEP 32** Re-connect the negative battery cable; turn IGN ON and test Mesh Gauge function.

INSTALLATION IS COMPLETE

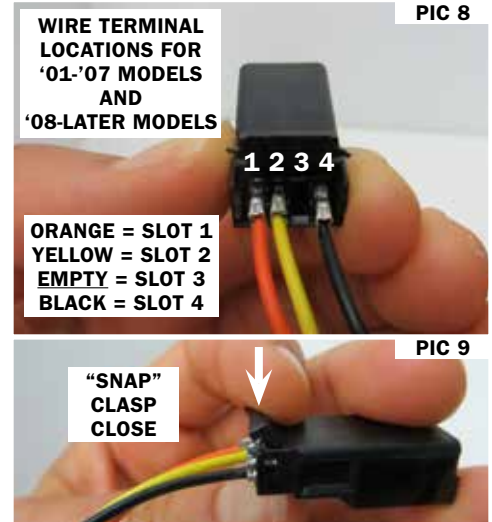

INSTALLATION INSTRUCTIONS

MESH L.E.D. FUEL AND BATTERY GAUGE, CHROME

6550

-CONTINUED-

CALIBRATION PROCEDURE (OPTIONAL):

Gasoline is very flammable; ensure that your work area is well ventilated.

Once you turn IGN ON, there is a 2 minute time limit to perform the following procedure.

Reset the procedure by turning IGN OFF, then turn IGN ON again.

Ensure the battery is at full charge before starting the procedure.

The Mesh Gauge cannot be calibrated if the fuel tank is MORE THAN 1/3 full.

The Mesh Fuel & Battery Gauge can not be calibrated unless it is in "Daylight" mode.

STEP 33 Refer to PIC 10. Shine a bright flashlight directly at the light sensor to activate "daylight" mode. Keep the flashlight aimed at the sensor until the procedure is finished. If the L.E.D.'s on the gauge dim during calibration, stop, turn IGN OFF, then turn IGN ON again and start over.

STEP 34 After the L.E.D.'s get brighter use your finger to totally cover the light sensor for EXACTLY three seconds; uncover the sensor. A green L.E.D. will light up in the middle of the fuel gauge section indicating the calibration mode has been entered.

STEP 35 Cover the sensor again with your finger until the green L.E.D. shuts off; uncover the sensor a second time.

STEP 36 Wait until the green L.E.D. lights up and again, cover the sensor with your finger again until it shuts off; uncover the sensor a third time.

STEP 37 Both fuel and battery section L.E.D.'s will cycle through and the left-most, red L.E.D. in the fuel section will begin flashing indicating "empty."

STEP 38 Turn IGN OFF, calibration is complete. You only need to calibrate the gauge one time.

VOLT METER OPERATION

The volt meter will show a range of 10 to 16 volts with the use of 7 lighted L.E.D.'s.

The L.E.D. lights will cycle from the RED low voltage through the RED high voltage when you first turn IGN ON and will stay lit from the Red low voltage through at least 1 or 2 YELLOW lights.

With the motorcycle running, the L.E.D.'s should be lit from the RED low voltage through 2 to 3 GREEN L.E.D.'s.

If the GREEN L.E.D.'s do not light after start up, or all the L.E.D.'s from the RED low voltage to either the YELLOW or RED high voltage stay lit, you should verify that the charging system is functioning correctly with a volt meter or have a qualified technician check the charging system of the motorcycle.



INSTALLATION INSTRUCTIONS

MESH L.E.D. FUEL AND BATTERY GAUGE, CHROME

6550

-CONTINUED-

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase whereas all other components shall be warranted for one (1) year.
6. All warranty claims must be directed to the place of purchase. Merchandise sold through internet auction sites or any other unauthorized reseller shall not carry a Kuryakyn warranty. If unsure, please contact the place of purchase to verify they are an authorized Kuryakyn reseller.

RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.

©2015 KURYAKYN HOLDINGS, LLC ALL RIGHTS RESERVED

KURYAKYN, KURYAKYN K logo and the marks appearing on this instruction sheet are registered and common law trademarks of Kuryakyn Holdings except noted third-party trademarks. A full listing of trademarks and trademark registrations owned by Kuryakyn Holdings can be found at www.kuryakyn.com/legal-notice.

Emissions Notice: The California Air Resources Board (CARB) does not permit the use of aftermarket emission-related parts(s) that alter the performance of OEM emission-related devices unless CARB has issued an Executive Order, other than on racing vehicles on closed courses. Check your local laws and manufacturer's information.

Listed Manufacturers and product model names are for reference only. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. All specifications are subject to change without notice.

For additional information on third-party product and company names, please consult our Web page at www.kuryakyn.com/legal-notice