



INSTRUCTIONS

-J02905

REV. 03-11-2003

Kit Number 94206-03

DOCUMENT HOLDER (CLEAR), UNDERSEAT

General

This kit fits all 2002 and later VRSC (V-Rod®) model motorcycles.


The kit contains the following items:

QTY	DESCRIPTION
1	Document holder, underseat (clear)
2	Velcro® loop fastener
1	Alcohol wipe

There are no service parts in this kit.

Installation

1. Unlock and open the seat. See the VRSC Owner's Manual.
2. See Figure 1. Hold the document holder in position on the underside of the seat frame, positioning to provide adequate clearance from the seat tether (2) and the rear seat pillion mounting bolt (3). Note the locations of the Velcro hook fasteners on each end of the document holder.
3. Clean the underside of the seat with the alcohol wipe from the kit.
4. Peel the backing from the Velcro loop fasteners and install on the seat frame as determined in Step 2, so the document holder fasteners will attach firmly.
5. Install the document holder with the "zipper" side up, and press into place.

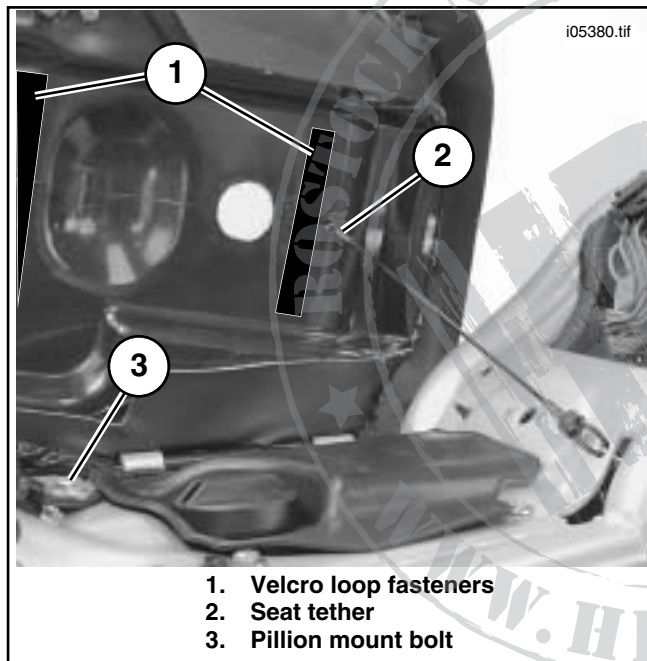

1. Velcro loop fasteners
2. Seat tether
3. Pillion mount bolt

Figure 1. Positioning the Velcro® Loop Fasteners

CAUTION

When closing the seat, make sure the ignition switch is in the FUEL position. If the ignition switch is in any other position when the seat is closed, the seat latch mechanism could be damaged.

6. Turn the ignition switch to FUEL, then close the seat and turn the ignition switch to LOCK.

WARNING

After locking the seat, pull upward on the latch side of the seat to be sure it is in locked position. If the seat is loose, it could shift position during vehicle operation, resulting in loss of control of the vehicle and death or serious injury.